


RF Single L/R

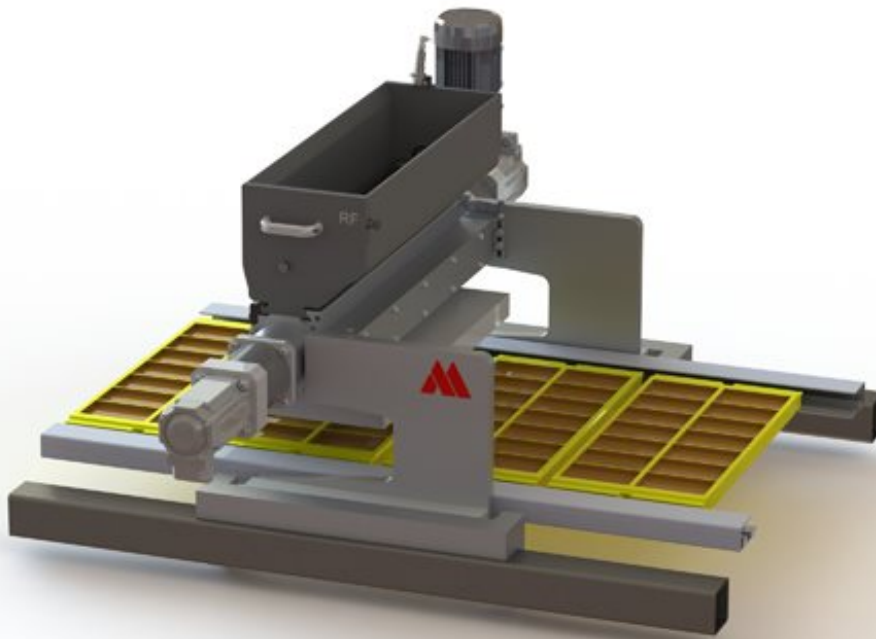

RF Single L/R


Stationary mounted depositor. Left/right mounted.

Stationary, right or left mounted depositor with built-in lifting and dynamic hopper movement. The RF line is a flexible depositor manufactured at the highest quality. The servo driven table into axis handles most masses. The built-in lifting movement can be servo or pneumatically driven. The hopper movement axis is servo driven. The RF depositor easily handles small inclusions.

This depositor is compatible with multi-color, one-shot, inclusions, chips and a variety of other heads. The RF depositor's production capacity ranges from 500 - 1200 lines, with belt widths ranging from 380 to 1080 mm. The depositor can also be made to suit any existing lines. The interactive touch screen menu makes this depositor easily operable. The depositor is also equipped with internet connection for technical support.

UPS/EFU

- High flexibility
- Suitable for diversified production
- Designed for spot deposit, bottoming or filling and small inclusions
- Easy cleaning and maintenance
- Cost-effective
- Easy and simple to operate

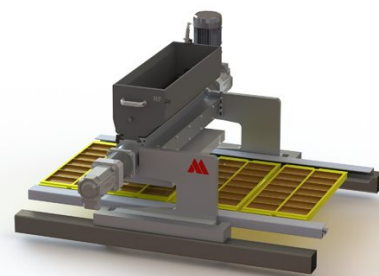

The Aasted Machinery Program

Find the technical specifications for the machine below.

	RF Single L/R 500	RF Single L/R 700	RF Single L R 1000	RF Single L R 1200
Capacity (kg/hour)	1440	1800	2880	3500
Length (mm)	1200	1400	1700	1900
Width (mm)	571	571	571	571
Height (mm)	790	790	790	790
Power usage (KwH)	3	3	3	3
Air usage (m3)	8	8	14	14
Water usage (m3)	0,007	0,008	0,01	0,013
Weight (kg)	240	275	330	365

We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- RF Single L/R O
- RF Single L/R V
- RF Single L R V O
- RF Triple L+R+T
- RF Triple L+R+T O
- RF Triple L+R+T V
- RF Triple L+R+T V O