

FRESH VAC®

**Modified Atmosphere
Packaging Machines**

A-200 PLC

**FROM THE PIONEERS IN
MODIFIED ATMOSPHERE
PACKAGING**

Built for precision operation, the A-200 PLC is designed for today's rigorous production schedules. It's fast, efficient and offers the consistent reproducibility to meet today's industry standards.

PLC controls with pre-set pack settings give it the flexibility to handle a wide range of package sizes and configurations.

Enhanced safety design, coupled with ease of installation and operations, makes the A-200 PLC the worldwide leader.

View our videos on-line
by scanning the QR
code



Or go to www.cvpystems.com

*Cutting edge technology from the leader in modified atmosphere packaging.
Made with pride in the USA since*



1972

A-200 PLC MODEL DESIGN FEATURES

Hygienic Designs

- Clean-in-place system for internal cleaning.
- External wash down capability.
- Stainless steel snorkels.

Flexibility

- Specific option packages for meat, poultry, dairy, liquids, nuts, powders, grains and industrial goods.
- Machine can be placed close to wall
- PLC controls with flexibility of pre-set controls.

Package Configurations

- Up to one ton combo bins with custom seal bars to 100 inches
- Floor and overhead mounting systems.
- Adjustable head for random package sizes.

Custom Options

- Custom PLC programs available.
- High and low Oxygen systems available.

Seal Integrity

- Digital temperature controls with hot bar or impulse wire systems.
- Seal bar profiles minimize leakers.
- Optional bag stretchers eliminate wrinkles, ensuring leak-free seals.

Reproducible Results

- 57" manifold with positive vacuum gas seal design.
- PLC controls with digital vacuum and gas flush controls with low level gas alarm.
- Accumulator tank for accelerated speed of operation.




Two Bag Case Ready




Bag in a Box



Bulk Chicken

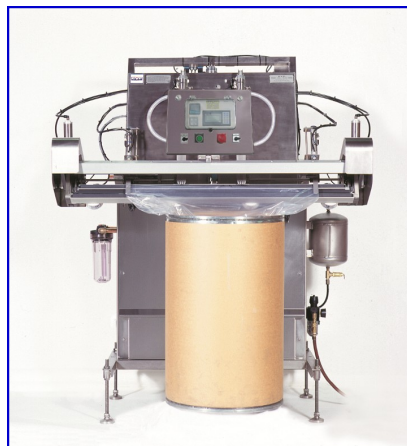

Floating Head for Barrels or Bins



Optional Bag Stretcher



Stainless Snorkels

Construction	Stainless Steel/Hard Anodized Aluminum
Dimensions	65" x 42" x 75" (1651mm x 1067mm x 1905mm)
Power Requirements	220/440 VAC, 3 Phase, 20/10 Amp
Air Consumption	1 CFM @ 80 psi/cycle
Manifold Length 57" (1448mm)	Effective Seal Length 53.75" (1365mm)
Seal Head Range of Adjustment	7" (178mm) Variable Travel; 2" (51mm), 3" (76mm), 4" (102mm) Fixed Increments 45° - 90° Pitch



2518 Wisconsin Avenue
Downers Grove, IL 60515 USA
Phone: (630) 852-1190
Website: www.cvpsystems.com
Email: sales@cvpsystems.com