

YOUR BEST PARTNER IN PACKAGING

Strong hermetic seals, complete flexibility and rugged, ultra-hygienic full stainless steel construction characterise the all new Delta 6000 BM, a system designed to allow customers to replace their more expensive pre-made bag solutions with lower cost film from a reel. The exceptionally strong seals created by the full box motion sealing head can easily withstand a vacuum cycle, making this new HFFS solution ideal for many larger sized fresh meat and cheese products. Available as a top or bottom reel machine, the Delta 60000 BM is particularly suited to lines running a variety of products, such as larger foodservice blocks of cheese, different sized cuts of primal fresh meat and processed meat, as the machine automatically cuts the pack size to each product's dimensions.



TECHNICAL SPECIFICATIONS

Machine Speed	Up to 60 cycles per minute. Production output depends on film sealability and product characteristics.	
Product Dimensions	Standard version	XL version
LENGTH	Up to 650mm - 25.6"	Up to 650mm - 25.6"
WIDTH (INTENDED AS PRODUCT HALF CIRCUMFERENCE)	320mm - 12.6" (jaws 350m -13.7") 420mm - 16.5" on request (jaws 450mm 17.7")	520mm - 20.5"
HEIGHT	Up to 230mm - 9", with small product traps	Up to 320 mm-12.6", with small product traps
Film Cut-Off	Min 150mm - 6" / Max 800mm - 31.5" Depending on film and product characteristics.	
Wrapping Materials	Shrink barrier films, laminated, co-extruded and all sealable films.	
Film Reel Dimensions	Standard version	XL version
CORE Ø	76.2mm - 3" 152.4mm - 6" on request	76.2mm - 3" 152.4mm - 6" on request
OUTER Ø	400mm - 15.7"	400mm - 15.7"
WIDTH	800mm - 31.5" 900mm - 35.4" available as an option	1200mm - 47.2"
Film Reel Max Weight	Standard version Depending on film reel width, up to 75 kg - 165 lbs	XL version Depending on film reel width, up to 90 kg - 200 lbs
Electronic Platform	Industrial PC On request different electronic control platform are available i.e. Allen Bradley, Siemens, Schneider-Elau, B&R.	
Power Requirement	From 220 to 480 V, 50/60 Hz, 7kVA	
Compressed Air	6 bar, 200l/min	
Machine Weight	1500 Kg - 3300 lbs	

MAIN FEATURES

Electronic machine with commercial available components

Hygienic designed machine

Modular construction design

No product no bag

Misplaced detection
(product out of phase inside film tunnel)



Top of the range seal strength

Separated electrical control panel
from the mechanical part

BENEFITS

- ▶ Higher reliability components
Easy maintenance
- ▶ Inhibition of bacteria proliferation/contamination sources
Minimise cleaning time
- ▶ Easy maintenance
Possibility to expand the machine option configuration & connect the machine with different feeding system
- ▶ Reduced film waste
(no empty bag)
- ▶ No products damaged or trapped by the sealing jaws reduced product waste no machine stoppages for out of phase products
- ▶ Isolate products from external contamination sources
Maximize shelf life minimizing spoilage
- ▶ Easy accessibility during maintenance operation

ILAPAK IS ISO 9001:2000 CERTIFIED

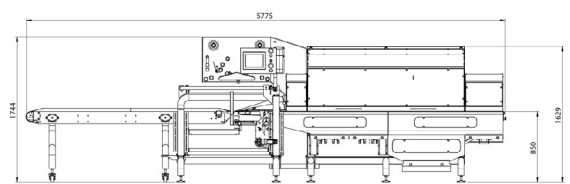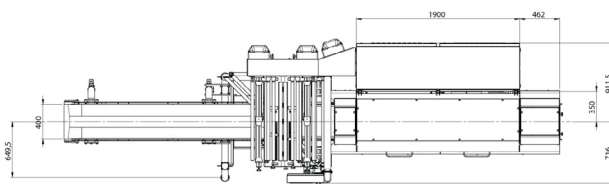

All measurements not specified in inches are given in millimeters.
Please discuss your needs with our local representative to configure these machines to your product's specific requirements. These specifications are not binding. We reserve that right to change them without prior notice.

Discover more about us, visit:

www.ilapak.com