

HOLLYMATIC 3000 MIXER/GRINDER



**IT'S PERFECT. THE HOLLYMATIC 3000
MIXER/GRINDER FILLS THE GAP BETWEEN
TOO BIG AND TOO SMALL.**

If your operation is somewhere between a supermarket and a large industrial processor...the Hollymatic 3000 Mixer/Grinder is perfect for you. Output rates up to 120 lbs/min depending on product and grind plate hole size. Solidly constructed of heavy gauge stainless steel with seam welded corners throughout, the Hollymatic 3000 offers smooth, easy to clean surfaces.

A programmable timer controls the forward and reverse automatic mix cycle, providing a homogeneous blend of product. Standard with variable speed for both mix and grind the model 3000 ensures optimum production.



Gemini Systems

Stainless steel feed screw, grinding head and adapter ring are standard. Pneumatic foot control is available to assist in filling trays for display. Powered by two independent gear reduction units, the Hollymatic 3000 delivers quiet and continuous, trouble free operation. For more information contact Hollymatic or your local Hollymatic Dealer today. **Hollymatic Corporation**
600 E. Plainfield, Road, Countryside IL 60525
Telephone: 708/579-3700 Fax: 708/579-1057
Web Address: www.hollymatic.com.



FOOD PROCESSING EQUIPMENT SINCE 1937

HOLLYMATIC 3000 MIXER/GRINDER



Open Grid Lid Allows Seasoning to Be Added During Operation

Safety Locked Counterbalanced Lid

Programmable Automatic Forward and Reverse Mixing Action



Right angle product feeding for minimum temperature rise

Variable Speed Mix and Grind

2 Independent Gear Motors For Mixing and Grinding


Stainless Steel Feed Screw Grinding Head and Mixing Paddle

Seamless, Fully Welded Heavy Duty Stainless Steel Construction

Heavy Duty Casters For Mobility


HOLLYMATIC SPECIFICATIONS

Hopper Capacity:	300 pounds
Grinding Head Size:	52 (5-1/8")
Production Capacity:	Up to 120 lbs./min. (depending on product & plate size)
Gear Motor (Mincing):	10HP
Gear Motor (Mixing):	1.5HP
Standard Voltage:	200-240V., 460V., 60Hz., 3ph. 36A
Net Weight:	880 lbs.



OPTIONS FOR 3000

- Footswitch
- Gemini connections to allow for continuous 1st and 2nd grind production.

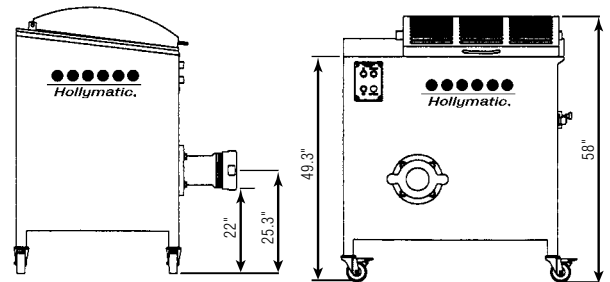

HOLLYMATIC WARRANTY

Six (6) months from date of purchase. Refer to warranty certificate for terms and conditions

HOLLYMATIC CORPORATION

600 E. Plainfield Road, Countryside, Illinois 60525
708/579-3700 Fax: 708/579-1057
Web Site: www.hollymatic.com



FOOD PROCESSING EQUIPMENT SINCE 1937