

vegatronic

500

inclined



www.ilapak.com



PACKAGING MACHINERY

TECHNICAL SPECIFICATIONS	S	P	SP
Machine speed	70 cpm	70 cpm	70 cpm
Bag size			
WIDTH MIN	50mm-2.0"	50mm-2.0"	50mm-2.0"
WIDTH MAX	270/280*mm-10.6/11.0"	260/270*mm-10.2/10.6"	Same as per S or P
LENGTH (greater length feasible on request)	330mm-13.0"	330mm-13.0"	330mm-13.0"
Wrapping materials	Heat sealable materials, such as polypropylene, barrier films, laminates, as well as polyethylene films.		
Film reel dimensions			
REEL WIDTH MAX	580mm-22.8"	580mm-22.8"	580mm-22.8"
REEL OUTER Ø MAX	400mm-15.7"	400mm-15.7"	400mm-15.7"
REEL CORE Ø MAX	76mm-3.0"	76mm-3.0"	76mm-3.0"
Film reel max weight	100kg-220lbs	100kg-220lbs	100kg-220lbs
Sealing system	Brushless motor driven horizontal sealing jaws-Pneumatic vertical seal bar		
	Standard heat-seal jaws and vertical seal bar	Ilaseal sealing system	Both S & P system
Electronic platform	PLC Omron for USA & Canada, in particular Allen Bradley platform available		
Program memory	40 programs		
HMI	5" monocolour touch screen		
Power req. (optional excluded)	AC 400 V+/-5%, 3 phase, neutral, 50/60Hz, 3.3kW, 5A		
Compressed air	350-500NI/min, 7 bar-101.5 psi	500-900NI/min, 7 bar-101.5 psi	Same as per S or P
Machine finish	Electrostatic epoxy powder coating-Stainless steel version *		
Machine handing	Right hand version, left hand version *		
Machine dimensions	(Width x Depth x Height) 1089 x 1992 x 1728 mm - 42.9" x 78.4" x 68"		
Machine weight	Approx. 650kg - 1433lbs		

* optional

MAIN FEATURES

PLC-controlled machine with touch-screen display
 Multi-language interface
 Easily programmable 40 product recipes
 Digital speed display
 Integrated temperature control
 Machine diagnostics
 Access password
 Robust mechanical construction with small footprint
 Reduced product drop height
 Configuration for PE and heat-sealable films
 Servo-driven horizontal jaw carriage
 Quick bag size change-over
 Gentle product handling with fixed machine inclination between 30 and 45°
 Bag length electronically measured and adjustable
 No-fill-no-bag function
 Complete synchronization of ancillary equipment such as weigher, printer, labeller, dosers, etc.


PACK STYLES



...and many more

Please discuss your needs with our local representative to configure these machines to your product's specific requirements.

ILAPAK is ISO 9001:2000 certified

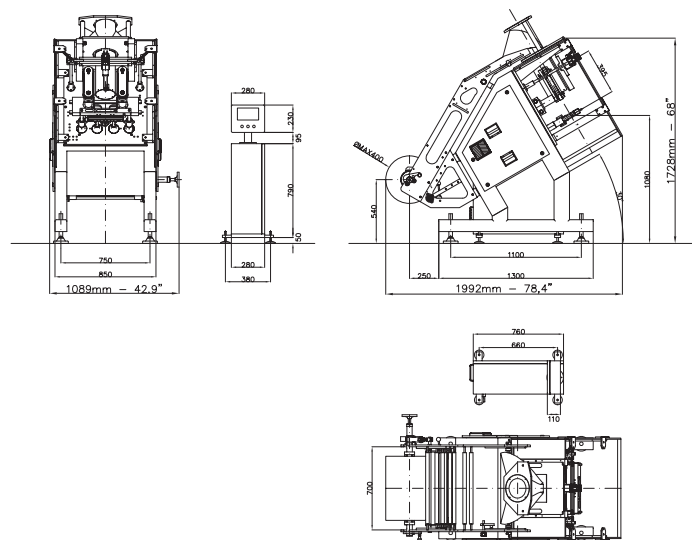

All measurements not specified in inches are given in millimeters.

These specifications are not binding. We reserve the right to change them without prior notice.