


SF Triple L+R+T

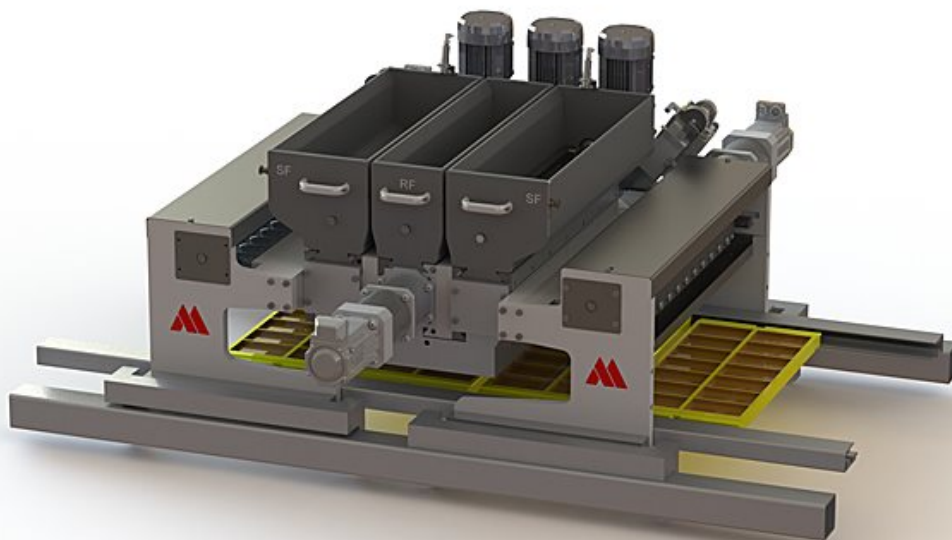

SF Triple L+R+T


Stationary mounted depositor. Designed for triple-shot depositing.

Triple shot configuration Stationary, right and left mounted piston head connected with a rotor depositor head, depositor with lifting and dynamic hopper movement. The SF line represents the flexible depositor with high build quality. The piston axes are servo driven and can handle most masses. The rotary and the lifting movement axes are optional servo or pneumatically driven. The hopper movement axes are servo driven. The SF easily handles big inclusions. Depositing parts can be delivered in a wide variety to suit the demand, for example, multi-colour, one-shot, inclusions, chips and many more. The SF depositor is available for 500 and up to 1200 lines, working widths ranging from 380 to 1080 mm, however, the depositor can be made to suit any existing lines as well. Operation is very simple via the intuitive touch screen menu. Further the depositor is able to connect to the internet, if any sort of support is needed.

Picture coming

UPS/EFU

- Simple and easy to operate
- Developed for small and medium sized productions
- Servo driven piston movement
- Cost-effective
- Easy cleaning and maintenance
-

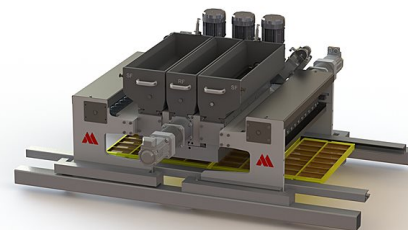

The Aasted Machinery Program

Find the technical specifications for the machine below.

	SF Triple L+R+T 500	SF Triple L+R+T 700	SF Triple L+R+T 1000	SF Triple L+R+T 1200
Capacity (kg/hour)	4600	7800	11800	15000
Length (mm)	1300	1500	2000	2200
Width (mm)	1300	1300	1300	1300
Height (mm)	790	790	790	790
Power usage (KwH)	8	8	8	8
Air usage (m3)	16	16	22	22
Water usage (m3)	0,014	0,016	0,02	0,026
Weight (kg)	510	750	1110	1350

We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- SF Double L+R O
- SF Double L+R
- SF Double L+R V
- SF Double L+R V O
- SF Single L/R
- SF Single L R O
- SF Single L R V
- SF Single L/R V O
- SF Triple L+R+T O
- SF Triple L+R+T V
- SF Triple L+R+T V O