

vegatronic

2000

inclined



www.ilapak.com



PACKAGING MACHINERY


TECHNICAL SPECIFICATIONS	S	P	SP
Machine speed	120 cpm	120 cpm	120 cpm
Bag size			
WIDTH MIN	50mm-2.0"	50mm-2.0"	50mm-2.0"
WIDTH MAX	370/380*mm-14.5/15.0"	360/370*mm-14.1/14.5"	360/370*-380/370*mm
LENGTH	480/630*mm-18.9"/24.8"	480/630*mm-18.9"/24.8"	480/630*mm-18.9"/24.8"
Wrapping materials	Heat sealable materials, such as polypropylene, barrier films, laminates, as well as polyethylene films.		
Film reel dimensions			
REEL WIDTH MAX	780/830*mm-30.7"/32.6"	780/830*mm-30.7"/32.6"	780/830*mm-30.7"/32.6"
REEL OUTER Ø MAX	600mm-23.6"	600mm-23.6"	600mm-23.6"
REEL CORE Ø MAX	76mm-3.0"	76mm-3.0"	76mm-3.0"
Film reel max weight	100Kg-220lbs	100Kg-220lbs	100Kg-220lbs
Sealing system	Motorised horizontal sealing jaws-pneumatic vertical seal bar		
	Standard heat-seal jaws and vertical seal bar	Ilaseal or Ilatherm constant/impulse heating	Both S & P system
Electronic platform	Industrial PC for USA & Canada, in particular Allen Bradley platform available		
Program memory	100 programs		
HMI	6"colour touch screen (10"*)		
Power req. (optional excluded)	AC 400 V+/-5%, 3 phase, neutral, 50 Hz,5.5 kW, 8 A		
Compressed air	350-500NI/min, 7 bar	500-900NI/min, 7 bar	Same as per S or P
Machine finish	Electrostatic epoxy powder coating-Stainless steel version *		
Machine handing	Right hand version, left hand version *		
Machine dimensions	(Width x Depth x Height) 1666 x 2460 x 1761 mm - 65.6" x 96.8" x 69.3"		
Machine weight	Approx. 1100kg – 2425lbs		

* optional

MAIN FEATURES

- Industrial PC with a 6" LCD-TFT multicolor touch screen display
- Multi-language interface
- Easily programmable 100 product recipes
- Machine diagnostics
- Motor driven horizontal jaw carriage with frequency inverter
- Quick bag size change-over
- Electronically controlled film tensioning system*
- Adjustable sealing jaw pressure and opening
- Bag length electronically measured and adjustable
- Configuration for PE* and heat-sealable films
- No-fill-no-bag function
- Hierarchical password access (operator, engineer, ILAPAK service)
- Complete synchronisation of ancillary equipment such as weigher, printer, labeller, dosers, etc.
- Servo-assisted drive for film centering system*


PACK STYLES

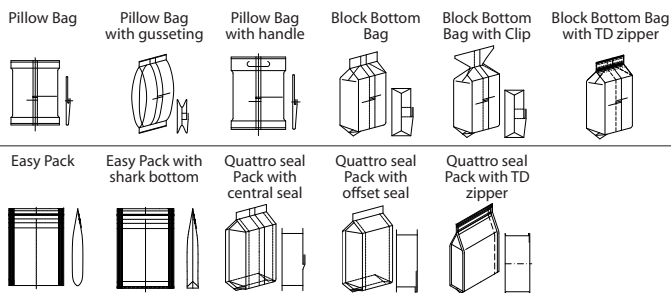

...and many more

Please discuss your needs with our local representative to configure these machines to your product's specific requirements.

ILAPAK is ISO 9001:2000 certified

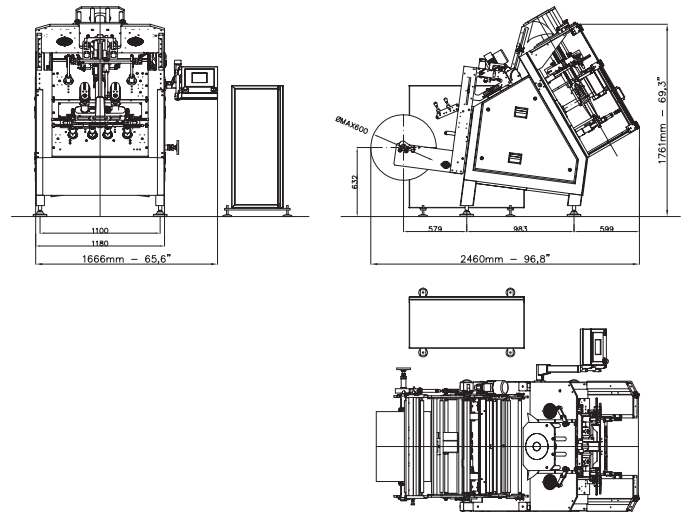

All measurements not specified in inches are given in millimetres.

These specifications are not binding. We reserve the right to change them without prior notice.