


# EP2-0 Chain




# EP2-O Chain

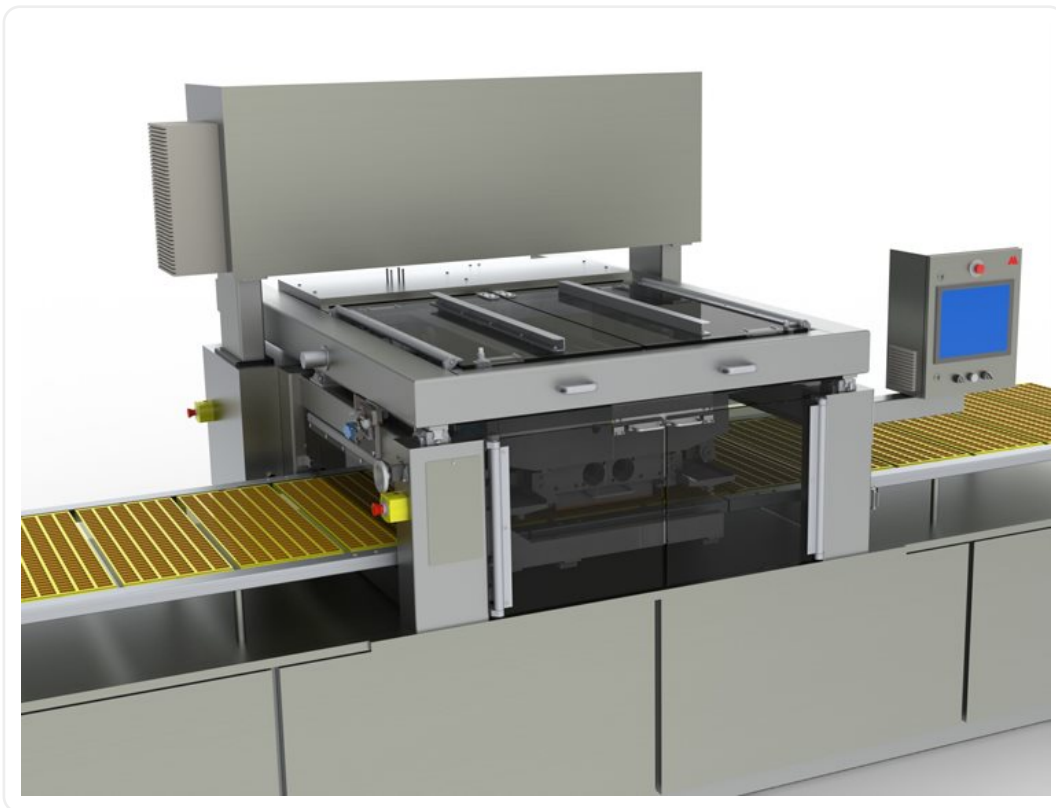

The EP2-O Chain is a stationary mounted depositor with a dynamic hopper and offline feature that makes it easily maneuverable for cleaning and switching depositing parts. Built-in lifting table with integrated mold shaking included.

## UPS/EFU

- Integrated mould shaker
- Easy to clean
- Easy switching of depositing parts
- High versatility
- Handles most confectionery masses
- Highest possible quality in output

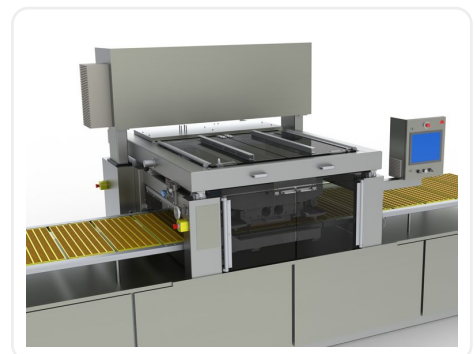

# The Aasted Machinery Program

Find the technical specifications for the machine below.

	EP2-O Chain 700	EP2-O Chain 750	EP2-O Chain 1000	EP2-O Chain 1200	EP2-O Chain 1300
<b>Capacity (kg/hour)</b>	3000	3450	4800	5700	6150
<b>Length (mm)</b>	1890	1990	2460	3030	3030
<b>Width (mm)</b>	1700	1700	1700	1700	1700
<b>Height (mm)</b>	1630	1630	1630	1630	1630
<b>Power usage (KwH)</b>	13	13	13	13	13
<b>Air usage (m3)</b>	6	6	6	6	6
<b>Water usage (m3)</b>	0,009	0,01	0,013	0,014	0,015
<b>Weight (kg)</b>	2800	2900	3200	3500	3700

## We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- EP2 (C-Frame)
- EP2-O (C-Frame)
- EP2-O Belt