


Vacuum Tumbler 350lts, 500lts and 800lts

High performance tumbler ready for use in the most complex processes of maceration, marinade and salt; with vacuum pump and programmable control screen.

- Cylindrical structure with a wide mouth of loading and unloading.
- Complete stainless steel construction up to 4mm in thickness.
- Easy cleaning.
- Unloading on standard carriers.
- Electric operation, does not need air.
- Tactile operator control panel completely programmable.
- Vacuum up to -1bar.
- Optional elevator for standard carrier.

Dimensions

	350LTS.	500LTS.	800LTS.
TUMBLER WIDTH (A):	840MM.	950MM.	1120MM.
HEIGHT (B):	1650MM.	1750MM.	1825MM.
BASE WIDTH (C):	700MM.	700MM.	720MM.
MAXIMUM LENGTH (D):	2625MM.	2760MM.	2810MM.
BASE HEIGHT (E):	1420MM.	1425MM.	1650MM.
UNLOADING HEIGHT (F):	810MM.	800MM.	705MM.
WEIGHT:	250Kg.	320 Kg.	380Kg.

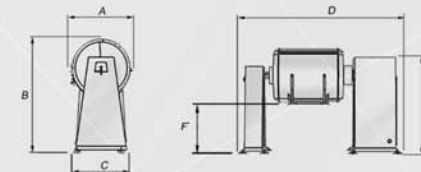

Technical data

	350LTS.	500LTS.	800LTS.
TUMBLER CAPACITY:	350LTS.	500LTS.	800LTS.
USEFUL LOAD WITHOUT VACUUM:	260Kg.	375Kg.	600Kg.
USEFUL LOAD WITH VACUUM:	135Kg.	200Kg.	450Kg.
ENGINE POWER:	1CV. / 0.75KW	2CV. / 1.5KW	4CV. / 3KW
VACUUM POWER:	0.75KW.	0.75KW.	1.1KW.
VACUUM PUMP CAPACITY M ³ /H:	25M ³ /H	25M ³ /H	40M ³ /H
WEIGHT:	250Kg.	350Kg.	425Kg.



Time, turn direction and vacuum are programmable from tactile operator control panel with programme memories.



Vacuum pump BUSCH programmable from tactile operator control panel.



The legs with integrated silen blocks prevent vibration and allows the machine to come to anchor to the ground.



Sliding lid with wide opening, compatible with standard elevator and unload on carrier.



- The interior position of the spades allows a perfect massage of York, shoulder, loin...
- This machine is suitable for processes of salt, marinade, maceration of ham, loins and other products like poultry, fish...
- Adjustable general speed when working
- Maceration processes are totally programmable in time, speed, turn direction and vacuum; memory of the processes
- Reducer engine with electrobrake and forced self-cooling ventilation of the engine.
- Transmission by chain drive.
- Vacuum pump prepared with special anti-humidity oil (for food industry).
- Fixation and anchor through vibration dampeners.
- Ready to use in cold-storage room.



Abad Maquinaria Industrial S.L.
C/Roure Gros 31 - 08181 Sentmenat (Barcelona) ESPAÑA
Telf: 93 715 45 13 Fax: 93 715 45 65
laint@laint.net - www.laint.es