


P5

Compact Gantry Palletizer Gripping/Transfer



- Reduced footprint
- Modular and versatile solution in terms of speed and number of palletizing stations
- Clear, easily accessible machine
- Enhanced ergonomics and safety

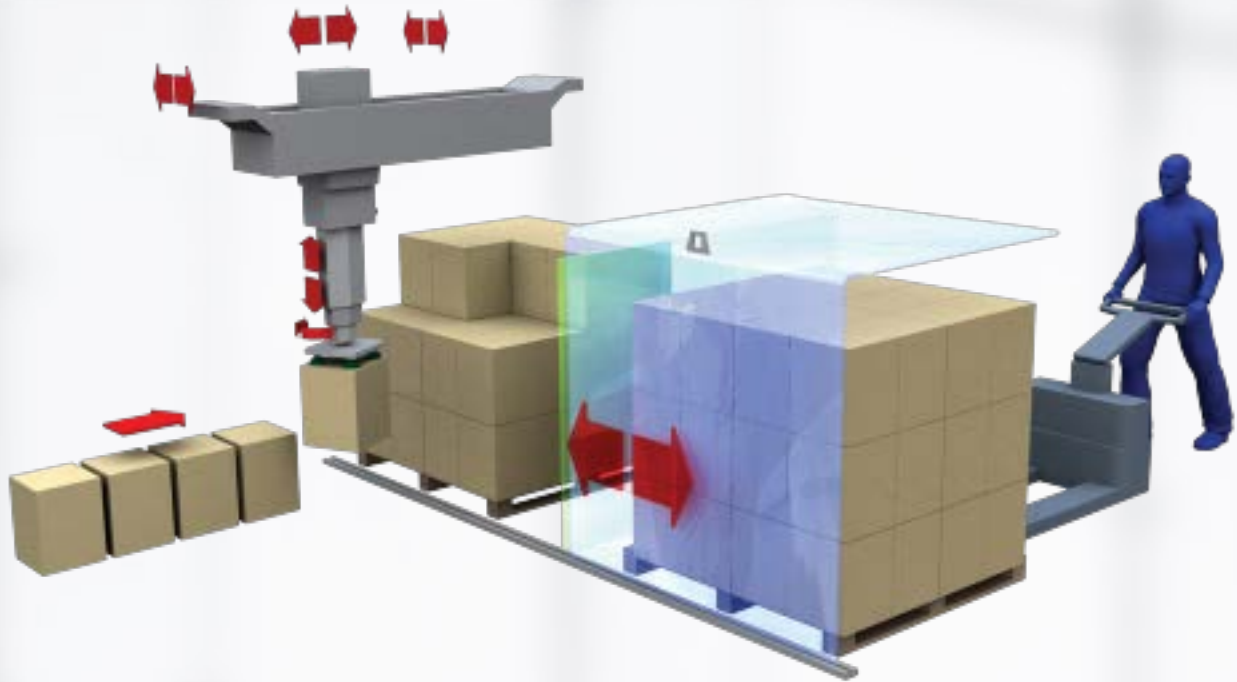

A gripping/transfer palletizing solution to meet your specific requirements:



TECHNICAL CHARACTERISTICS

- Ground level access into the machine; lower section is left free thanks to the gantry structure
- Minimum footprint: palletizer perimeter dimensions as near as possible to the pallet dimensions
- Overall machine height reduced and visibility/appearance improved by using a telescopic mast

ADVANTAGE

- Naturally wide working envelope within a compact frame thanks to the gantry design
- SecurBox®: transparent sliding cubicle enabling the operator to evacuate a loaded pallet safely without stopping the machine cycle; palletization continues on the second station

PERFORMANCE

- Payload: up to 12kg with tooling
- Speed: up to 7.5 cycles per minute depending on the application
- Versatility: 1, 2 or 3-station model with optional pallet gripping, layer card insertion, etc.
- Option: PC HMI/remote maintenance kit

First in line

Cermex
87, route de Seurre - B.P.3 - 21910 Corcelles-lès-Cîteaux - France
Tél. : +33 (0) 380 707 100

Gebo Cermex Headquarters
Rue du Commerce, CS 73455 Reichstett - 67455 Mundolsheim - France
Tél. : +33 (0) 388 183 850

contact.us@gebocermex.com

www.gebocermex.com

