


FreshVac®**Modified Atmosphere
Packaging Machines****A-200 MultiLine®XT****FROM THE PIONEERS IN
MODIFIED ATMOSPHERE
PACKAGING**

Built for precision operation, the A-200-XT Multiline is designed for today's rigorous production schedules. It's fast, efficient and offers the consistent reproducibility to meet today's industry standards.

Ease of installation and operations, makes the A-200 MultiLine®XT the worldwide leader in MAP applications.

View our videos on-line by scanning the QR code

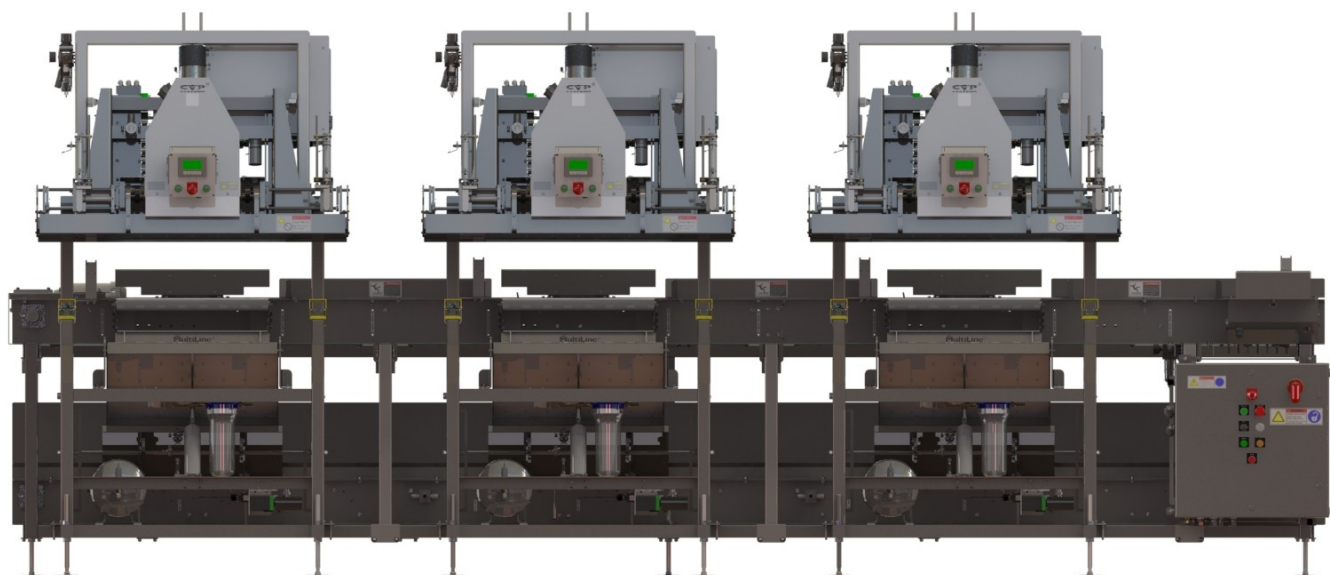




*Cutting edge technology from the leader in modified atmosphere packaging.
Made with pride in the USA since*

**1972**

A-200 MultiLine^{XT} 3 Head Multiline and Conveyor

CONVEYOR UTILITY REQUIREMENTS:
 ELECTRICAL POWER: 220V/240 VAC, 3 PHASE, 60 HZ., 20/15 AMPS
 COMPRESSED AIR: 80 PSI, 5 CFM

MACHINE HEAD UTILITY REQUIREMENTS:
 ELECTRICAL POWER: 120V/220 VAC, SINGLE PHASE, 60 HZ., 20/10 AMPS
 COMPRESSED AIR: 80 PSI, 5 CFM (PER MACHINE)
 EACH SEALING HEAD REQUIRES INDIVIDUAL ELECTRICAL AND COMPRESSED AIR CONNECTIONS

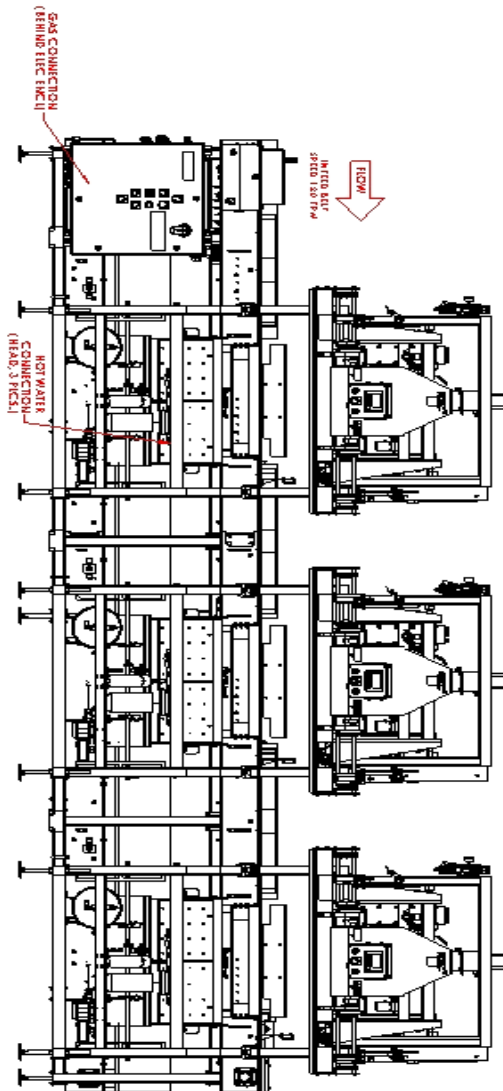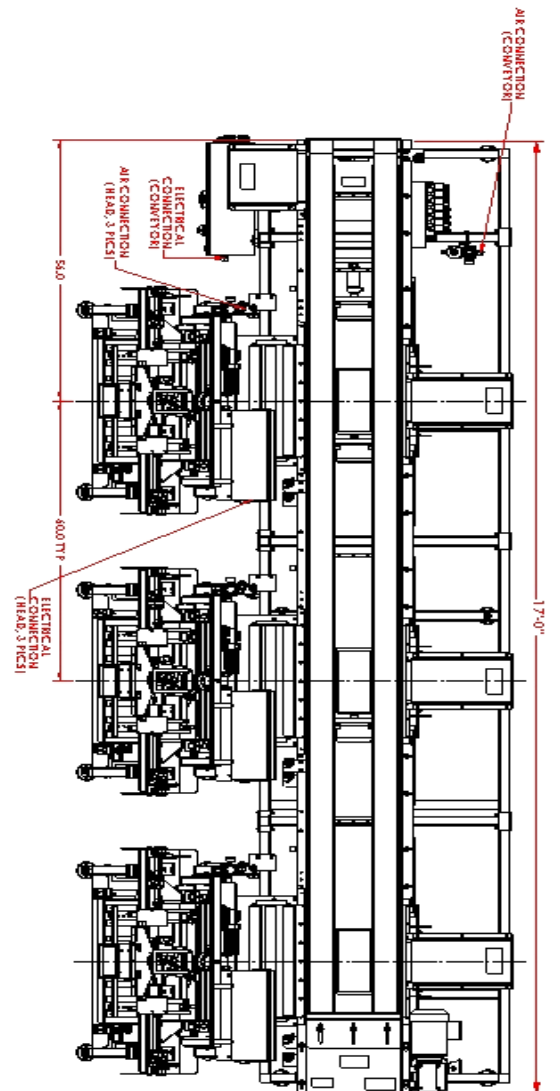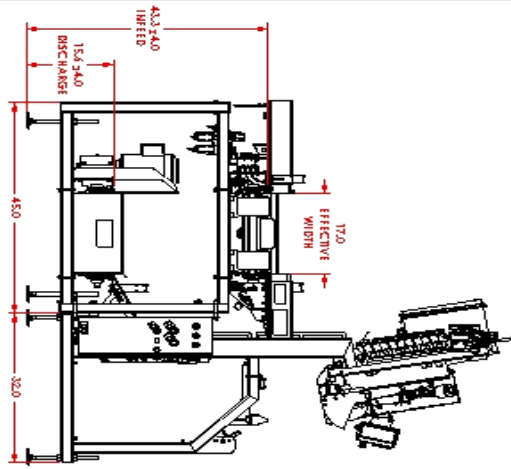

BOX SIZE LIMITS
 LENGTH: 14" MIN/26" MAX
 WIDTH: 13.5" MIN/16.5" MAX
 HEIGHT: 5" MIN/13" MAX

BAG SIZE LIMITS
 BAG STRETCHER: 39" WIDE MIN/42.5" MAX
 BAG CLAMPS: 30" WIDE MIN/44" MAX


BOXES WITH FLAPS MUST BE RUN WITH FLAPS FOLDED DOWN, BAG CUFFED OVER FLAPS.

THIS DRAWING IS THE PROPERTY OF
 CRYSTAL GEAR & TOOL CO., INC.
 IT IS TO BE USED FOR THE PROJECT
 SPECIFICALLY IDENTIFIED HEREIN.
 IT IS NOT TO BE REPRODUCED OR
 TRANSMITTED IN ANY FORM OR BY
 ANY MEANS, ELECTRONIC OR MECHANICAL,
 INCLUDING PHOTOCOPYING, RECORDING,
 OR BY ANY INFORMATION STORAGE
 AND RETRIEVAL SYSTEM, WITHOUT
 THE WRITTEN PERMISSION OF CRYSTAL
 GEAR & TOOL CO., INC.

DATE	11/11/11	BY	11/11/11
REV	1	DATE	11/11/11
REV	2	DATE	11/11/11
REV	3	DATE	11/11/11
REV	4	DATE	11/11/11
REV	5	DATE	11/11/11
REV	6	DATE	11/11/11
REV	7	DATE	11/11/11
REV	8	DATE	11/11/11
REV	9	DATE	11/11/11
REV	10	DATE	11/11/11
REV	11	DATE	11/11/11
REV	12	DATE	11/11/11
REV	13	DATE	11/11/11
REV	14	DATE	11/11/11
REV	15	DATE	11/11/11
REV	16	DATE	11/11/11
REV	17	DATE	11/11/11
REV	18	DATE	11/11/11
REV	19	DATE	11/11/11
REV	20	DATE	11/11/11
REV	21	DATE	11/11/11
REV	22	DATE	11/11/11
REV	23	DATE	11/11/11
REV	24	DATE	11/11/11
REV	25	DATE	11/11/11
REV	26	DATE	11/11/11
REV	27	DATE	11/11/11
REV	28	DATE	11/11/11
REV	29	DATE	11/11/11
REV	30	DATE	11/11/11
REV	31	DATE	11/11/11
REV	32	DATE	11/11/11
REV	33	DATE	11/11/11
REV	34	DATE	11/11/11
REV	35	DATE	11/11/11
REV	36	DATE	11/11/11
REV	37	DATE	11/11/11
REV	38	DATE	11/11/11
REV	39	DATE	11/11/11
REV	40	DATE	11/11/11
REV	41	DATE	11/11/11
REV	42	DATE	11/11/11
REV	43	DATE	11/11/11
REV	44	DATE	11/11/11
REV	45	DATE	11/11/11
REV	46	DATE	11/11/11
REV	47	DATE	11/11/11
REV	48	DATE	11/11/11
REV	49	DATE	11/11/11
REV	50	DATE	11/11/11
REV	51	DATE	11/11/11
REV	52	DATE	11/11/11
REV	53	DATE	11/11/11
REV	54	DATE	11/11/11
REV	55	DATE	11/11/11
REV	56	DATE	11/11/11
REV	57	DATE	11/11/11
REV	58	DATE	11/11/11
REV	59	DATE	11/11/11
REV	60	DATE	11/11/11
REV	61	DATE	11/11/11
REV	62	DATE	11/11/11
REV	63	DATE	11/11/11
REV	64	DATE	11/11/11
REV	65	DATE	11/11/11
REV	66	DATE	11/11/11
REV	67	DATE	11/11/11
REV	68	DATE	11/11/11
REV	69	DATE	11/11/11
REV	70	DATE	11/11/11
REV	71	DATE	11/11/11
REV	72	DATE	11/11/11
REV	73	DATE	11/11/11
REV	74	DATE	11/11/11
REV	75	DATE	11/11/11
REV	76	DATE	11/11/11
REV	77	DATE	11/11/11
REV	78	DATE	11/11/11
REV	79	DATE	11/11/11
REV	80	DATE	11/11/11
REV	81	DATE	11/11/11
REV	82	DATE	11/11/11
REV	83	DATE	11/11/11
REV	84	DATE	11/11/11
REV	85	DATE	11/11/11
REV	86	DATE	11/11/11
REV	87	DATE	11/11/11
REV	88	DATE	11/11/11
REV	89	DATE	11/11/11
REV	90	DATE	11/11/11
REV	91	DATE	11/11/11
REV	92	DATE	11/11/11
REV	93	DATE	11/11/11
REV	94	DATE	11/11/11
REV	95	DATE	11/11/11
REV	96	DATE	11/11/11
REV	97	DATE	11/11/11
REV	98	DATE	11/11/11
REV	99	DATE	11/11/11
REV	100	DATE	11/11/11


MULTILINE CNV
 DIMENSIONAL DWG
 A200 XT

2 Head Multiline and Conveyor

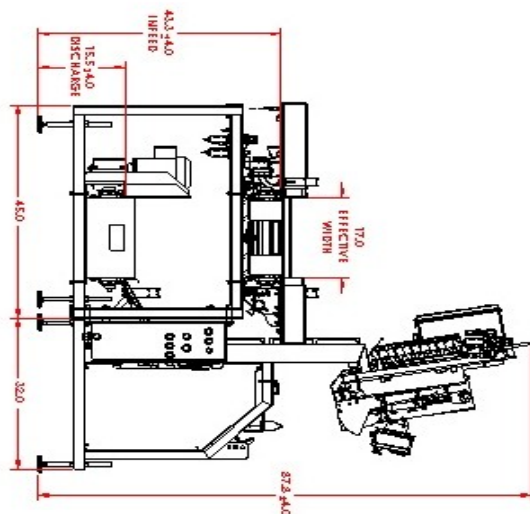

CONVEYOR UTILITY REQUIREMENTS:
ELECTRICAL POWER: 220/440 VAC, 3 PHASE, 60 HZ., 20/15 AMP/PS
COMPRESSED AIR: 80 PSI 5 CFM


MACHINE HEAD UTILITY REQUIREMENTS:
ELECTRICAL POWER: 120/220 VAC, SINGLE PHASE, 60 HZ, 20/10 AMP
COMPRESSED AIR: 80 PSI, 5 CFM (PER MACHINE)
EACH SEALING HEAD REQUIRES INDIVIDUAL ELECTRICAL AND
COMPRESSED AIR CONNECTIONS

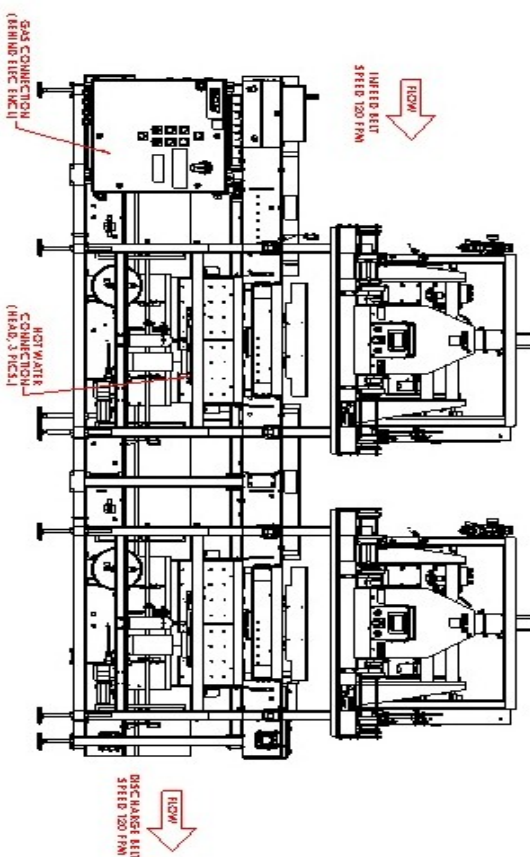

BOX SIZE LIMITS
LENGTH: 14" MIN/26" MAX
WIDTH: 13.5" MIN/16.5" MAX
HEIGHT: 5" MIN/13" MAX

BOXES WITH FLAPS MUST BE RUN WITH FLAPS FOLDED DOWN BAG CUFFED OVER FLAPS.

BAG SIZE LIMITS
BAG STRETCHER: 33" WIDE MIN / 42.5" MAX
BAG CLAMPS: 30" WIDE MIN / 44" MAX

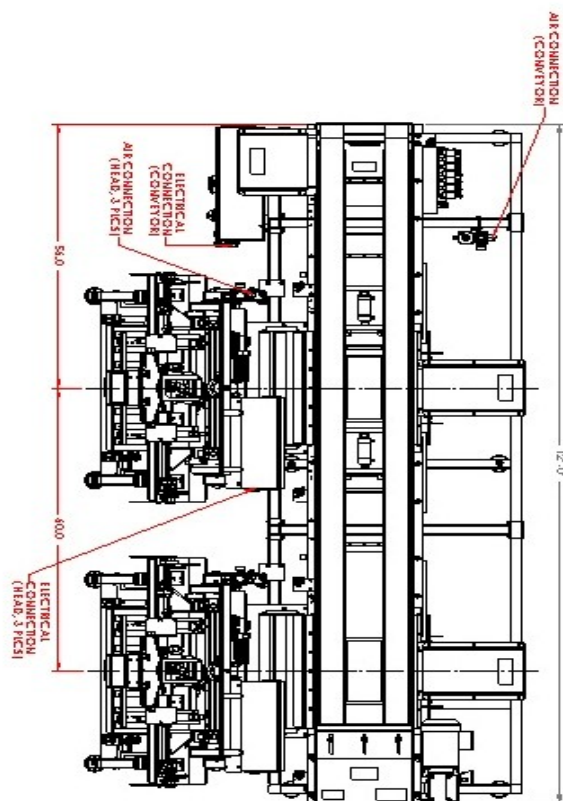[illegible]

A-200 MultiLine^{XT} DESIGN FEATURES



Hygienic Designs

- Clean-in-place system for internal cleaning.
- External wash down capability.
- Stainless steel snorkels.

Flexibility

- Specific option packages for meat, poultry, dairy, liquids, nuts, powders, grains and industrial goods.
- PLC controls with flexibility of pre-set controls.

Custom Options

- Custom PLC programs available.
- High and low Oxygen systems available.

Seal Integrity

- Digital temperature controls with hot bar or impulse wire systems.
- Seal bar profiles minimize leakers.
- Standard bag stretchers eliminate wrinkles, ensuring leak-free seals.

Reproducible Results

- Heat seal manifold with positive vacuum gas seal design.
- PLC controls with digital vacuum and gas flush controls with low level gas alarm.
- Accumulator tank for accelerated speed of operation.

Construction	Stainless Steel	
Dimensions	209" x 72" x 84" (5296mm x 1829mm x 2133mm)	
Power Requirements	120/220 VAC 1 Phase, 20/10 Amp 220/440 VAC 3 Phase, 20/10 Amp	
Air Consumption	50 CFM @ 100 PSI for System, 1/2" I.D supply Line	
Manifold Length 48 " (1220 mm)	Effective Seal Length 46" (1168 mm)	
Seal Head Range of Adjustment	5" (127mm)	
Configuration	Max Bag Size	Min Bag Size
Single bag stretcher	42.5"	33"
Bag Clamps	44"	30"



2518 Wisconsin Avenue
Downers Grove, IL 60515 USA
Phone: (630) 852-1190
Website: www.cvpsystems.com
Email: sales@cvpsystems.com