


# VEGATRONIC 6000



[www.ilapak.com](http://www.ilapak.com)

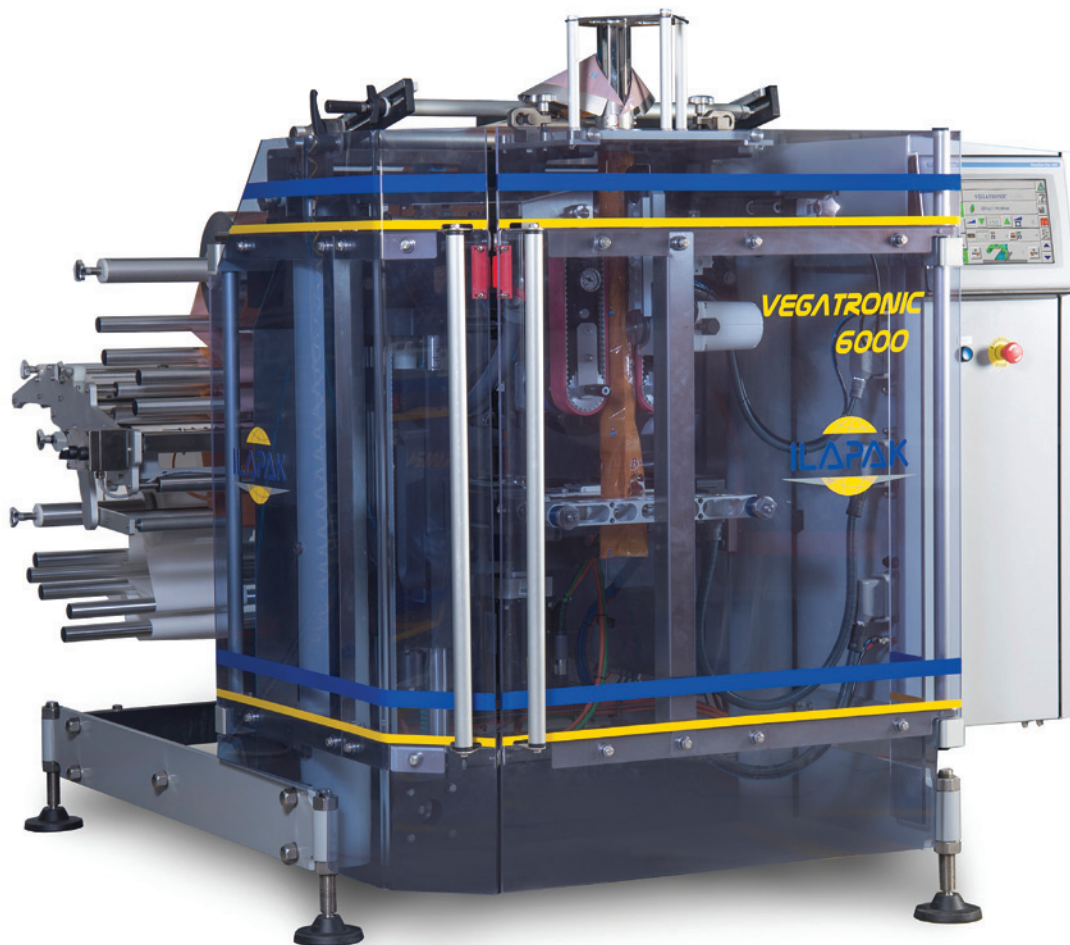

PACKAGING MACHINERY

TECHNICAL SPECIFICATIONS	S	P	SP
<b>Machine speed</b>	210 cpm	210 cpm	210 cpm
<b>Bag size</b>			
WIDTH MIN	40mm-1.6"	40mm-1.6"	40mm-1.6"
WIDTH MAX	270/280*mm-10.6/11.0"	260/270*mm-10.2/10.6"	Same as per S or P
LENGTH	500mm-19.7"	500mm-19.7"	500mm-19.7"
<b>Wrapping materials</b>	Heat sealable materials, such as polypropylene, barrier films, laminates, as well as polyethylene films.		
<b>Film reel dimensions</b>			
REEL WIDTH MAX	680/720*mm-26.8"/28.3"	680/720*mm-26.8"/28.3"	680/720*mm-26.8"/28.3"
REEL OUTER Ø MAX	500mm-19.7"	500mm-19.7"	500mm-19.7"
REEL CORE Ø MAX	76mm-3.0"	76mm-3.0"	76mm-3.0"
<b>Film reel max weight</b>	50kg-110lbs	50kg-110lbs	50kg-110lbs
<b>Sealing systems:</b>			
<b>Vertical</b>	Drag seal bar (std.)/ Rotating sealing belt *		
<b>Horizontal</b>	Standard heat-seal jaws	laseal or llatherm jaws	Both S & P system
<b>Electronic platform</b>	Industrial PC for USA & Canada, Allen Bradley platform as an option		
<b>Program memory</b>	100 programs		
<b>HMI</b>	10" colour touch screen		
<b>Power req. (optional excluded)</b>	400 Vac+/-5%, 3 ph, neutral, GND, 50 Hz, 11 kW, 16 A		
<b>Compressed air</b>	350-500NI/min, 7 bar-101.5 psi	500-900NI/min, 7 bar-101.5 psi	Same as per S or P
<b>Machine finish</b>	Electrostatic epoxy powder coating-Stainless steel version *		
<b>Machine handing</b>	Right hand version, left hand version *		
<b>Machine dimensions</b>	(Width x Depth x Height) 1456 x 2410 x 1405 mm - 57.3" x 94.9" x 55.3"		
<b>Machine weight</b>	Approx. 800 kg - 1764 lbs		

\* optional



MAIN FEATURES

- Modular hygienic open frame design
- High-speed continuous film motion machine
- Industrial PC with a 10" LCD-TFT multicolor touch screen display
- Multi-language interface
- Easily programmable 100 product recipes
- Machine diagnostics features
- Quick bag size change-over
- Forming set with assisted removal
- Motorized film reel unwind
- Wash-down stainless steel execution
- Compact footprint
- Low product drop
- Brushless drive for jaw closing and opening and for the sealing jaws up and down movement
- Adjustable sealing jaw pressure and opening
- Wide range of bag styles
- Bag length electronically measured and adjustable
- Configuration for PE and heat-sealable films
- Automatic film reel splicer available as an option
- Full ultrasonic system available as an option (longitudinal and transversal)
- Hierarchical password access (operator, engineer, ILAPAK service)
- Complete synchronization of ancillary equipment such as weigher, printer, labeller, dosers, etc.

These specifications are not binding. We reserve the right to change them without prior notice.

Please discuss your needs with our local representative to configure these machines to your product's specific requirements.

ILAPAK is ISO 9001:2000 certified

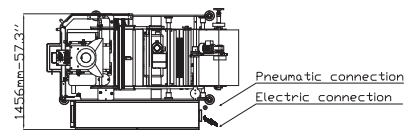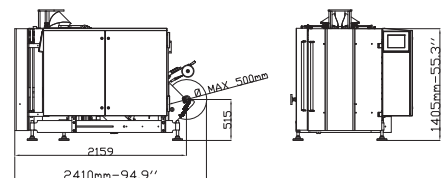

All measurements not specified in inches are given in millimetres.

PACK STYLES

