


# RF Single L/R O

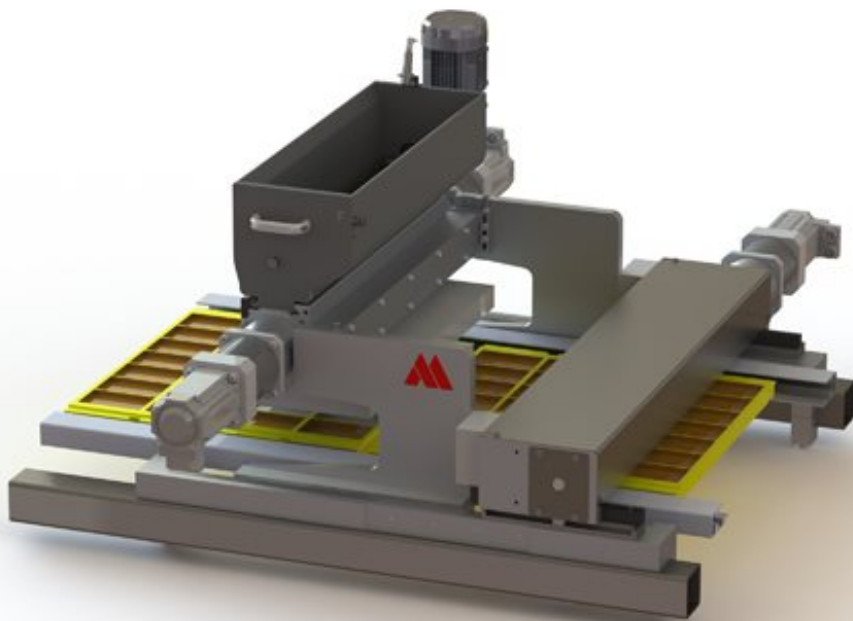

# RF Single L/R O


Stationary mounted depositor with dynamic hopper movement. Left/right mounted.

Stationary, right or left mounted depositor with built-in lifting and dynamic hopper movement. The RF line is a flexible depositor manufactured at the highest quality. The servo driven double rotor axis handles most masses. The built-in lifting movement can be servo or pneumatically driven. The hopper movement axis is servo driven. The RF depositor easily handles small inclusions.

This depositor is compatible with multi-color, one-shot, inclusions, chips and a variety of other heads. The RF depositor's production capacity ranges from 500 - 1200 lines, with belt widths ranging from 380 to 1080 mm. The depositor can also be made to suit any existing lines. The interactive touch screen menu makes this depositor easily operable. The depositor is also equipped with internet connection for technical support.

## UPS/EFU

- Low power consumption
- Servo driven dual rotor
- Easy handling and cleaning
- 
- Dynamic hopper movement
- Suitable for diversified production

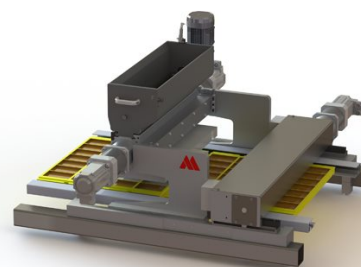

# The Aasted Machinery Program

Find the technical specifications for the machine below.

	RF Single L/RO 500	RF Single L/R O	RF Single L/R O 1000	RF Single L/R O 1200
<b>Capacity (kg/hour)</b>	1440	1800	2880	3500
<b>Length (mm)</b>	1300	1500	2000	2200
<b>Width (mm)</b>	995	995	995	995
<b>Height (mm)</b>	790	790	790	790
<b>Power usage (KwH)</b>	4	4	4	4
<b>Air usage (m3)</b>	8	8	14	14
<b>Water usage (m3)</b>	0,007	0,008	0,01	0,013
<b>Weight (kg)</b>	280	325	390	435

## We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- RF Single L/R
- RF Single L/R V
- RF Single L R V O
- RF Triple L+R+T
- RF Triple L+R+T O
- RF Triple L+R+T V
- RF Triple L+R+T V O