

Fabbricatori di ghiaccio a cubetti : E21-E25-E35-E35L-E45-E50-E60-E75-E85-E90-E150

Ice Cube Machines : E21-E25-E35-E35L-E45-E50-E60-E75-E85-E90-E150

85kg - 187lbs

DATI TECNICI - SPECIFICATIONS


	COND.	COMP. W	ABS. W	FUSE	Kwh/100Kg	l/h	kg	Lbs	kg	Lbs
E 85 A		1250	620	10	20,6	7.44	55	121	63	139
E 85 W		1250	450	10	12,4	50,4	54	119	62	136

PRODUZIONE DI GHIACCIO - ICE PRODUCTION **kg/24h - lbs/24h**



60

30 x 26 x 40 (mm)
17 gr.



CAPACITA' DEPOSITO - BIN CAPACITY

36 kg - 79 lbs 2117 pcs

DIMENSIONI - DIMENSIONS

LxPxH(mm): 700 x 585 x 956

WxDxH(in): 27 8/16" x 23 1/16" x 37 10/16"



220-240/50/1



R134a

Raffreddamento ad aria Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.				
°C	32°	21°	15°	10°	
°F	90°	70°	60°	50°	
10°	71	79	82	85	
50°	157	174	181	187	
21°	66	73	76	78	
70°	146	161	168	172	
32°	54	59	61	63	
90°	119	130	134	139	
38°	46	49	51	53	
100°	101	108	112	117	

Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.				
°C	32°	21°	15°	10°	
°F	90°	70°	60°	50°	
10°	66	75	78	81	
50°	146	165	172	179	
21°	64	70	75	77	
70°	141	154	165	170	
32°	61	68	72	74	
90°	134	150	159	163	
38°	56	64	68	70	
100°	123	141	150	154	

MARCHI - MARKS









CONSUMI - ENERGY



TECNOLOGIE-TECHNOLOGIES



MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
-10%		+10%
1 Bar (14 psi)		5 Bar (70 psi)

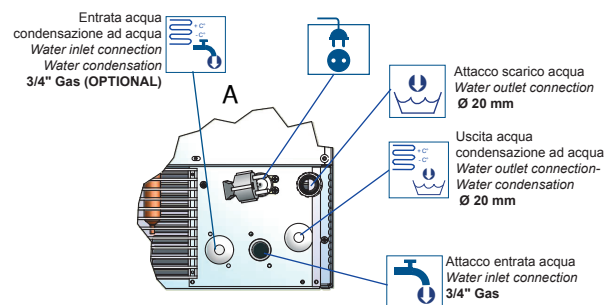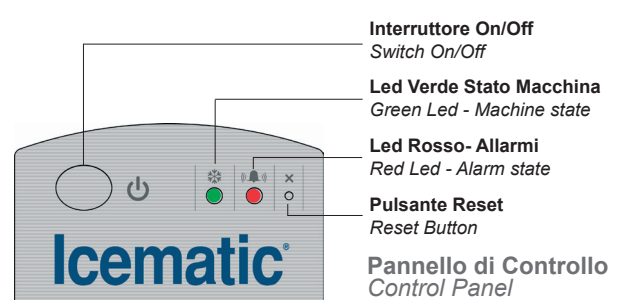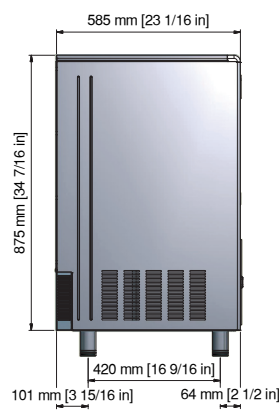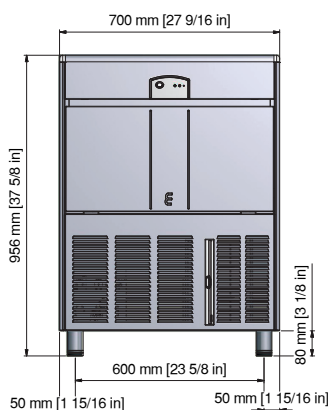

Ingressi/Uscite Posteriori Back Inlet/outlet