




## AUTOMATIC PRESSES

Presses with automatic loading and unloading for legs and shoulders of ham, meat and meat products.

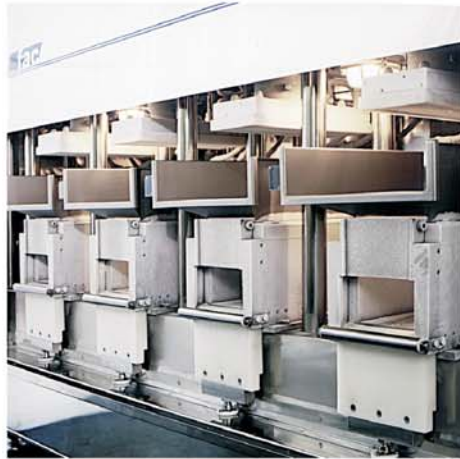

### PRFA-4

Automatic press for boneless ham.  
Rectangular mould with cooling system, pressing on two sides, upper and lower.  
Automatic loading and unloading.




Feeding and emptying conveyor belts.  
Adjustable pressing and massage cycle.

# AUTOMATIC PRESSES

PPresses with automatic loading and unloading for legs and shoulders of ham, meat and meat products.

## PRA-4

Products that are designed for sale as sliced, homogenous products should have a regular shape. A built-in fully automatic pressing process represents a considerable saving on labour.

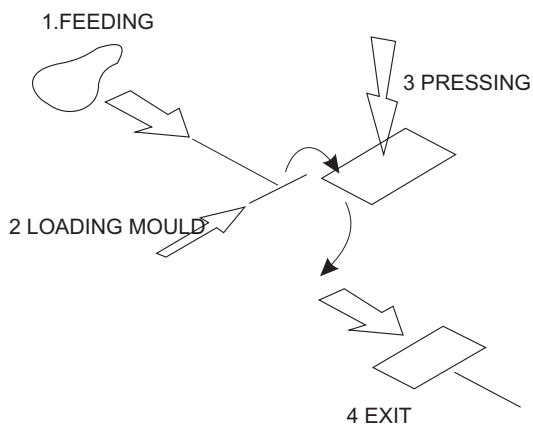

The press works completely automatically. An operator is required to load the product on the conveyor belt and collect the finished product from the conveyor belt exit bay. The built-in processor performs the functions needed to keep the heads operating at maximum potential.

*Heads with standard mould.  
Plastic counter mould.  
Rectangular mould measured to the client's specifications..  
Hydraulic action pressing.  
Pneumatic automatism.  
Adjustable pressing and massage time.  
Automatic feeding system.  
Loading conveyor belt with 3000mm accumulation length.  
Automatic unloading with conveyor belt to collect and extract.  
Built in stainless steel aisi.304*

**.Optional**  
*Mould and counter mould with cooling circuit  
Cooling system*

## PRA-4

Length:	6.670mm.
Width:	2.850mm.
Height:	2.050mm.
Weight:	6.500 kg.
Power :	32 CV.
Electrical consumption:	24 KW.
Compr. air consumption:	0.6m <sup>3</sup> /h.
Compr. Air pressure:	6 bar.
Output:	120/ 600P/h.