



GIZZARD HARVESTER



foodmate

Poultry Processing Systems

The gizzard harvester separates poultry gizzards from the intestines, cleans the gizzards and removes the gizzard skin. It is possible to combine the gizzard harvester with

a screw conveyor, inspection table, gizzard washing machine, gizzards fat remover, cooler and pump to have a production line.



Our mission is to innovate, automate and bring cost-effective solutions to the industry.



GIZZARD HARVESTER

Key Benefit:

- Allows for a maximum of 6,000 birds per hour
- Easy to operate, hygienic cleaning application and low maintenance.
- Wide adjustment range.
- Comparable wear less at high reliability.
- Exactly adjustable spray water volume each section.
- Low electricity consumption.
- Installation in the evisceration section along with heart and liver area.
- Optimum peeling at highest yield.
- Modified and durable transfer chain for gizzards



Foodmate is an equipment manufacturing company based in the Netherlands. Founded in 2006, we focus primarily on poultry processing, and we recently launched Foodmate US, expanding our worldwide distribution into North America. Driven by research, paired with unmatched knowledge and decades of experience, it's our mission to innovate, automate and bring cost-effective solutions to the industry.

Our product line spans a wide assortment of processing equipment designed for live bird handling, killing and de-feathering, eviscerating, chilling, weighing, cut-up systems, deboning, and more. In addition to manufacturing, we provide an extensive variety of spare parts and service for other processing equipment and reconditioned machines.

Our team represents decades of industry knowledge and experience resulting in the engineering, development and implementation of new designs for our clients and their ever-changing needs.

Technical Specifications:

- Stainless steel frame and motor
- Power :
 - Circular knife: 1.1 kW
 - Drive: 1.5 kW
 - Total: 2.6 kW
- Water :
 - Consumption: 1 – 1.5 m³/h
 - Pressure: min. 2 Bar, max. 4 Bar
- Connection: female thread, 1"
- Diameter of drainpipe: 114 mm.
- Machine dimensions
 - Length: 1930 mm
 - Width: 705 mm
 - Height: 1150 mm
 - Weight: approx. 355 kg

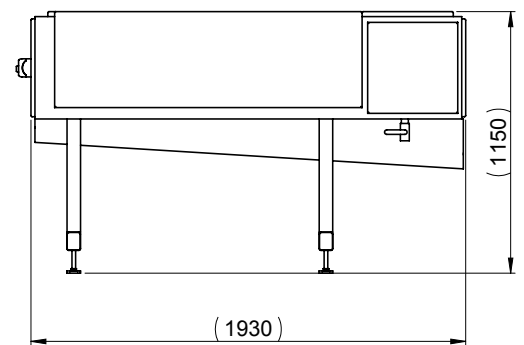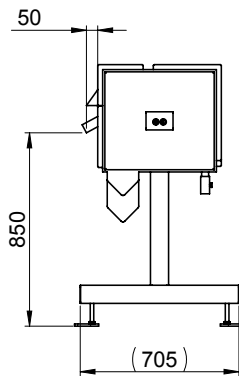

FOODMATE B.V.
 Röntgenstraat 18 • 3261 LK Oud-Beijerland
 P.O. Box 1405 • 3260 AK Oud-Beijerland
 The Netherlands
 Phone: +31-186 630240 • Fax: +31-186 630249
 info@foodmate.nl
 www.foodmate.nl

FOODMATE US, Inc.
 300 Wilbanks Drive, Ball Ground, GA 30107
 P.O. Box 4116, Canton, GA 30114
 U.S.A.
 Phone: +1-678-819-5270 (U.S.) • Fax: +1-678-819-5273
 info@foodmateusa.com
 www.foodmateus.com

