


V-SMART



www.ilapak.com

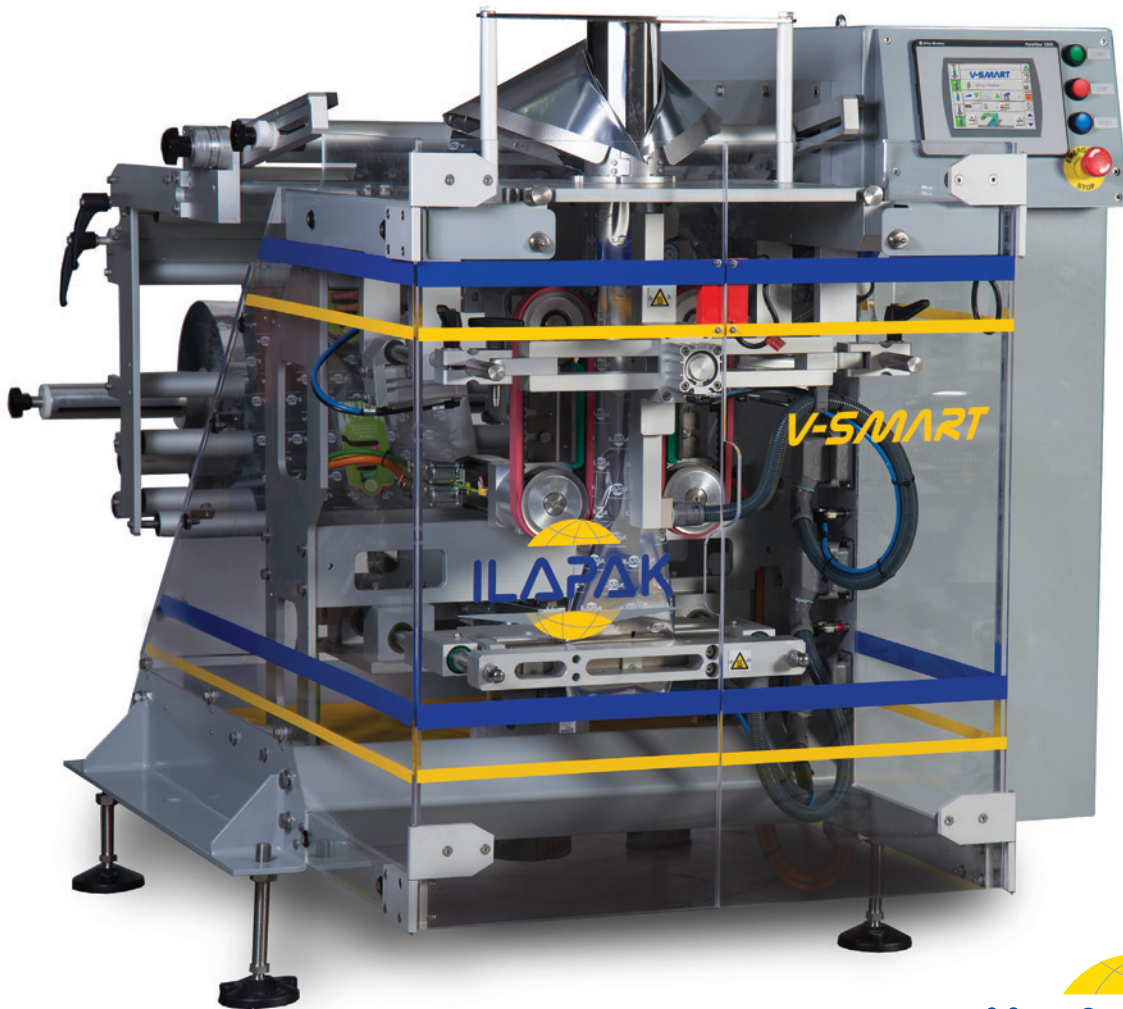

PACKAGING MACHINERY


TECHNICAL SPECIFICATIONS	S	P	SP
Machine speed	80 cpm	80 cpm	80 cpm
Bag size			
WIDTH MIN	40mm-1.6"	40mm-1.6"	40mm-1.6"
WIDTH MAX	270/280*mm-10.6/11.0"	260/270*mm-10.2/10.6"	Same as per S or P
LENGTH (greater length feasible on request)	330mm-13.0"	330mm-13.0"	330mm-13.0"
Wrapping materials	Heat sealable materials, such as polypropylene, barrier films, laminates, as well as polyethylene films.		
Film reel dimensions			
REEL WIDTH MAX	580mm-22.8"	580mm-22.8"	580mm-22.8"
REEL OUTER Ø MAX	350mm-13.8"	350mm-13.8"	350mm-13.8"
REEL CORE Ø MAX	76mm-3.0"	76mm-3.0"	76mm-3.0"
Film reel max weight	40kg-90lbs	40kg-90lbs	40kg-90lbs
Sealing systems:	Brushless motor driven horizontal sealing jaws-pneumatic vertical seal bar		
	Standard heat-seal jaws and vertical seal bar	Ilaseal or Ilatherm constant heating	Both S & P system
Electronic platform	Allen Bradley Micrologix 850		
Program memory	40 programs		
HMI	6" touch screen		
Power req. (optional excluded)	400 Vac+/-5%, 3 ph, neutral, GND, 50 Hz, 6 kW, 9 A		
Compressed air	350-500NI/min, 7 bar	500-700NI/min, 7 bar	Same as per S or P
Machine finish	Electrostatic epoxy powder coating		
Machine dimensions	(Width x Depth x Height) 1190 x 1915 x 975 mm - 46.8" x 75.4" x 38.4"		
Machine weight	Approx. 450kg - 992lbs		

* optional

MAIN FEATURES

- Open Frame concept
- Unbeatable entry-level design
- Allen-Bradley PLC based control architecture with touch-screen display
- Multi-language interface
- Easily programmable 40 product recipes
- Digital speed display
- Integrated temperature control
- Machine diagnostics
- Access password
- Compact footprint
- Low product drop
- Horizontal jaws driven by brushless motor
- Quick bag size change-over
- Bag length electronically measured and adjustable
- No-fill-no-bag function
- Complete synchronisation of ancillary equipment such as weigher, printer, labeller, dosers, etc.



PACK STYLES

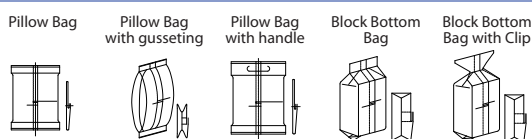

...and many more

Please discuss your needs with our local representative to configure these machines to your product's specific requirements.

ILAPAK is ISO 9001:2000 certified

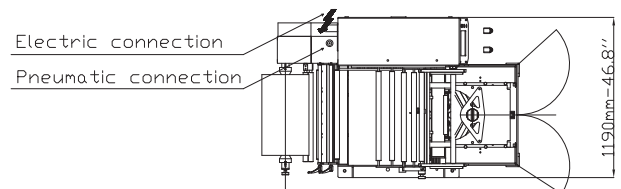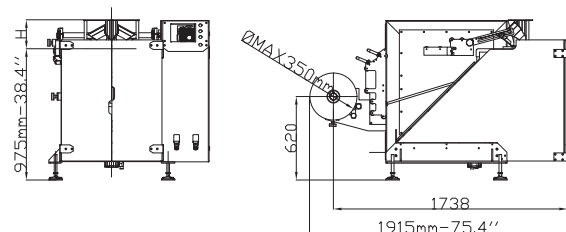

All measurements not specified in inches are given in millimetres.

These specifications are not binding. We reserve the right to change them without prior notice.