


MF Single L/R O

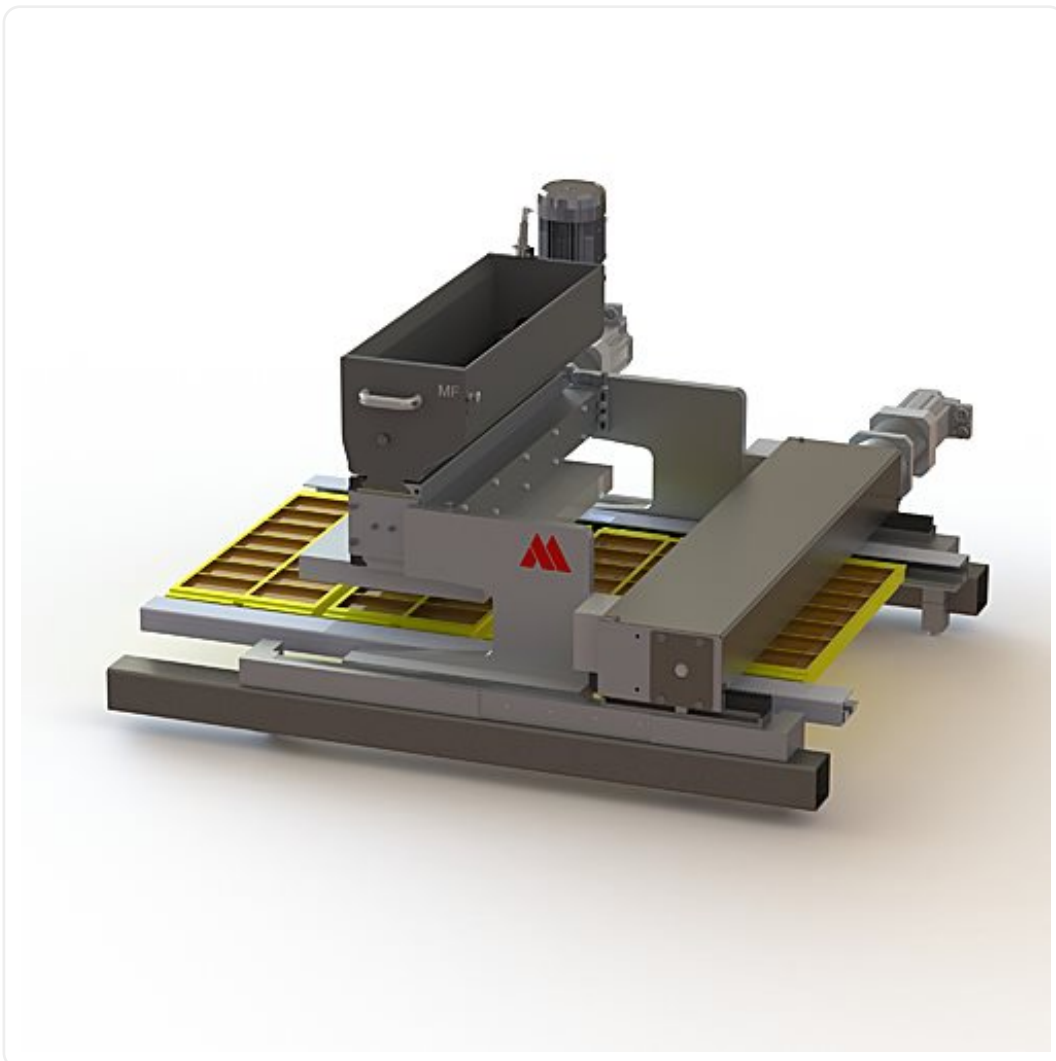


MF Single L/R O

Stationary mounted depositor with dynamic hopper movement. Left or right mounted.

Stationary, right or left mounted, depositor. The MF depositor collection is manufactured at the highest quality. All machines have a servo driven mono pump that handles masses of varying viscosities and inclusions. This depositor is compatible with multi-color, one-shot, inclusions, chips and a variety of other heads. depositor's production capacity ranges from 500 - 1200 lines, with belt widths ranging from 380 to 1080 mm. The depositor can also be made to suit any existing lines. The interactive touch screen menu makes this depositor easily operable. The depositor is also equipped with internet connection for technical support.

UPS/EFU

- Easy maintenance
- Cost effective
- Easy to build in to already existing lines
- Easy cleaning
- Especially advantageous for spot or long deposit
- Very suitable for bottoming and continuing strings

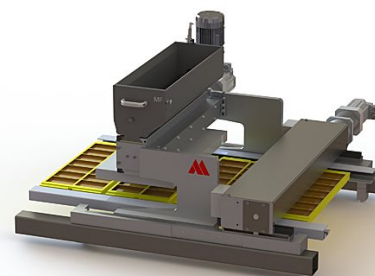

The Aasted Machinery Program

Find the technical specifications for the machine below.

	MF Single L/R O 500	MF Single L/R O 700	MF Single L/R O 1000	MF Single L/R O 1200
Capacity (kg/hour)	1800	1800	2500	2500
Length (mm)	1300	1500	2000	2200
Width (mm)	995	995	995	995
Height (mm)	790	790	790	790
Power usage (KwH)	3	3	3	3
Air usage (m3)	8	8	14	14
Water usage (m3)	0,007	0,008	0,01	0,013
Weight (kg)	280	325	390	435

We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- MF Single L/R
- MF Single L/R V
- MF Single L/R V O