


Ice maker with control system and stainless steel cabinet....

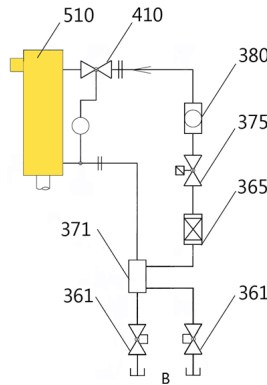

- 361 stop valve
 - 365 filter drier
 - 371 heat exchanger
 - 375 solenoid valve
 - 380 sight glass
 - 410 expansion valve
 - 510 freezing unit (evaporator)
- B refrigeration unit provided by customer


...only for connection to one single freezing unit

Main characteristics

- Capacity: 250 kg / 24 h flake ice chipped type
- Production of flake ice chipped type with $-0,5\text{ }^{\circ}\text{C}$ from drinking water or demineralized water - Standard- or Microlce
- Designed for continuous operation - 24 hours - 7 days a week
- Hygienic Design: Closed watersystem - no contamination by external influences
- Environmental friendly technology - No moving parts in the refrigeration circuit of the evaporator - no refrigerant leakage
- for connection to a separate refrigeration unit - Refrigerant: R404A





StandardIce



Microlce

Dimensions and connections

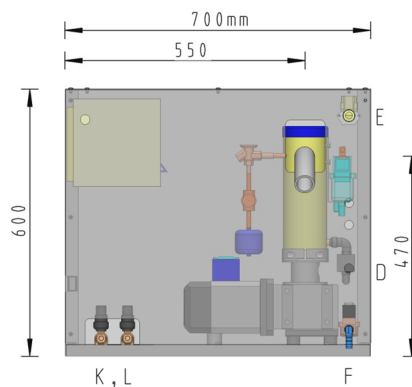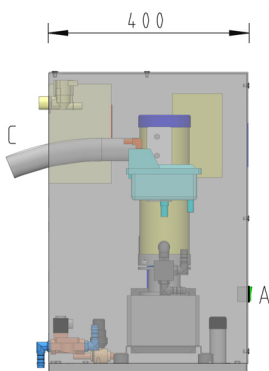

- A operating switch
- C ice discharge
- D electr. connection
- E water supply
- F water drain
- K liquid pipe
- L suction pipe

provided by customer:
 water filter
 stop cock
 electr. protection
 waste water connection (contactless)

Technical Data

	ZBE 250 E
250 kg / 24 h nominal capacity at	15 °C water temperature
cabinet dimensions (L x W x H)	50 cm x 70 cm x 61 cm
weight	40 kg
cabinet	stainless steel 1.4301
ice discharge	see specification "ice outlets"
electricity	
power consumption	0,28 kW
current consumption	1,4 A
potential-free contact	start-stop signal
provided by customer	
electric supply	1/N/PE ~ 230V 50 Hz
fuse, slow-blow	6 A
cable cross section, Cu	1,5 mm ²
signal cable	to be agreed
water	
supply / drain	3/4 " / 14 mm
provided by customer	
pressure	1 - 5 bar
quality	drinking water quality
pH-value	7,2 - 9,5 pH
hardness	6 - 14 °dH
temperature	100 - 250 mg CaCO ₃ /l 5 °C - 30 °C
ambient temperature	5 °C - 45 °C
cooling	
evaporator	ZBE 250
evaporation temperature	-16 °C
refrigerating capacity	1,1 kW
connection liquid line, Cu	10 mm
connection suction pipe, Cu	12 mm
provided by customer for the ice maker	
refrigerant	R404A
condensation temperature	≤ 45 °C
condenser	stepless speed controlled
refrigeration unit	layout according to individual requirements possible

Subject to technical modifications. In case of deviations please contact us.

Scope of supply

The ZIEGRA ice maker will be ready for connection to a separate cooling unit as well as water and electricity and be delivered according to EC- standards.

ZIEGRA quality and reliability

- All necessary control units for connection to a separate refrigeration unit page 1
- Pre-wired switch box including potential-free contact
- 3 min. overrun to use the re-evaporation after switch-off
- Overload cut-out / thermal switch for all motors
- water supply control

Included accessories

- Flexible ice discharging hose
- Switch-off by thermostat when the ice bin or recipient is full.
- Connecting cable 3,5 m
- Flexible hose water supply 2 m
- drain hose 2m
- PE ice shovel