
SF Triple L+R+T O





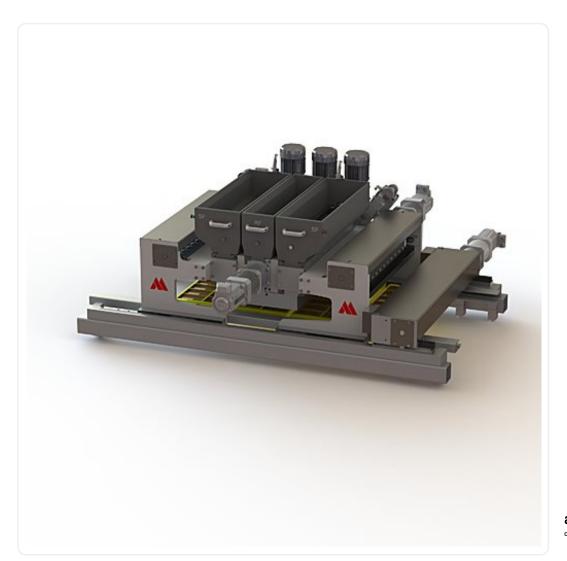

SF Triple L+R+T O

Stationary mounted depositor with dynamic hopper movement. Designed for triple-shot depositing.

t Configuration. Stationary, right and left mounted picton Triple head co ropr epsior he SF lii and I vnam e. depositor with high build quality. The piston axes are servo driven and can handle most masses. The rotary and the lifting movement axes are optional servo or pneumatically driven. The hopper movement axes are servo driven. The SF easily handles big inclusions.Depositing parts can be delivered in a wide variety to suit the demand, for example, multi-colour, one-shot, inclusions, chips and many more. The SF depositor is available for 500 and up to 1200 lines, working widths ranging from 380 to 1080 mm, however, the depositor can be made to suit any existing lines as well.Operation is very simple via the intuitive touch screen menu. Further the depositor is able to connect to the internet, if any sort of support is needed.

UPS/EFU

- High flexibility
- Advantageous for long One-Shot filled bars, truffle balls, eggs, liqueur pralines, closed products with ingredients and multi-color products.
- Easy cleaning and maintenance
- ٠
- Simple and easy operation
- Developed for small and medium sized productions





The Aasted Machinery Program

Find the technical specifications for the machine below.

	SF Triple L+R+T O 500	SF Triple L+R+T O 700	SF Triple L+R+T O 1000	SF Triple L+R+T O 1200
Capacity (kg/hour)	4600	7800	11800	15000
Length (mm)	1300	1500	2000	2200
Width (mm)	1765	1765	1765	1765
Height (mm)	790	790	790	790
Power usage (KwH)	9	9	9	9
Air usage (m3)	16	16	22	22
Water usage (m3)	0,014	0,016	0,02	0,026
Weight (kg)	565	805	1240	1510

We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- SF Double L+R O
- SF Double L+R
- SF Double L+R V
- SF Double L+R V O
- SF Single L/R
- SF Single L R O
- SF Single L R V
- SF Single L/R V O
- SF Triple L+R+T
- SF Triple L+R+T V
- SF Triple L+R+T V O