


# RF Triple L+R+T O

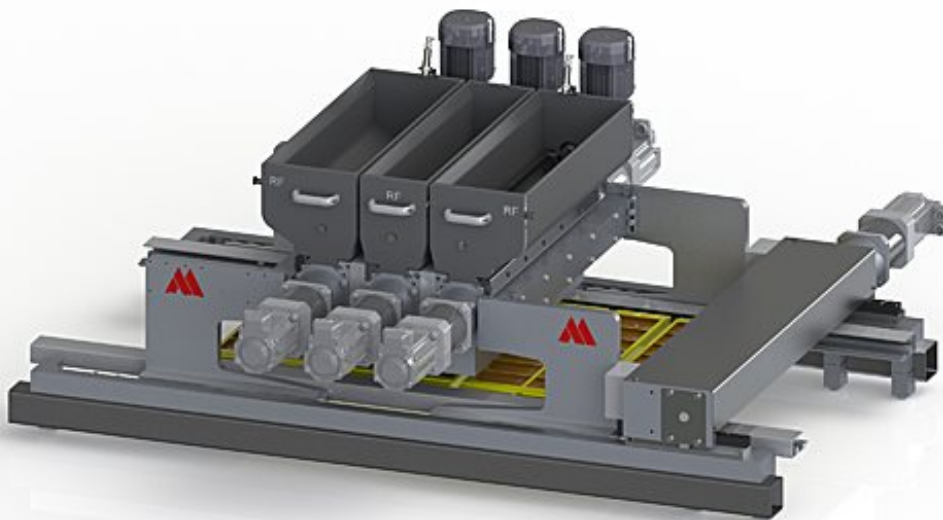

# RF Triple L+R+T O


Stationary mounted depositor with dynamic hopper movement. Compatible with triple-shot depositing.

Stationary, right or left mounted depositor with built-in lifting and dynamic hopper movement. The RF line is a flexible depositor manufactured at the highest quality. The servo driven double motor axis handles most masses. The built-in lifting movement can be servo or pneumatically driven. The hopper movement axis is servo driven. The RF depositor easily handles small inclusions.

This depositor is compatible with multi-color, one-shot, inclusions, chips and a variety of other heads. The RF depositor's production capacity ranges from 500 - 1200 lines, with belt widths ranging from 380 to 1080 mm. The depositor can also be made to suit any existing lines. The interactive touch screen menu makes this depositor easily operable. The depositor is also equipped with internet connection for technical support.

## UPS/EFU

- Simple operation
- Easy cleaning and maintenance
- High quality and flexibility
- 
- Low energy consumption
- Dynamic hopper movement

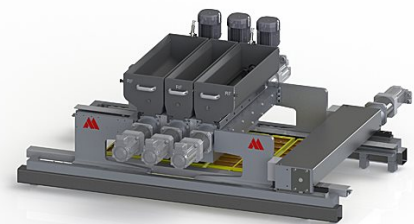

# The Aasted Machinery Program

Find the technical specifications for the machine below.

	RF Triple L+R+T O 500	RF Triple L+R+T O 700	RF Triple L+R+T O 1000	RF Triple L+R+T O 1200
<b>Capacity (kg/hour)</b>	4300	5400	8640	10500
<b>Length (mm)</b>	1300	1500	2000	2200
<b>Width (mm)</b>	1765	1765	1765	1765
<b>Height (mm)</b>	790	790	790	790
<b>Power usage (KwH)</b>	11	11	11	11
<b>Air usage (m3)</b>	8	8	14	14
<b>Water usage (m3)</b>	0,014	0,016	0,02	0,026
<b>Weight (kg)</b>	565	805	1240	1510

## We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- RF Single L/R
- RF Single L/R O
- RF Single L/R V
- RF Single L R V O
- RF Triple L+R+T
- RF Triple L+R+T V
- RF Triple L+R+T V O