


SF Single L/R V O



SF Single L/R V O

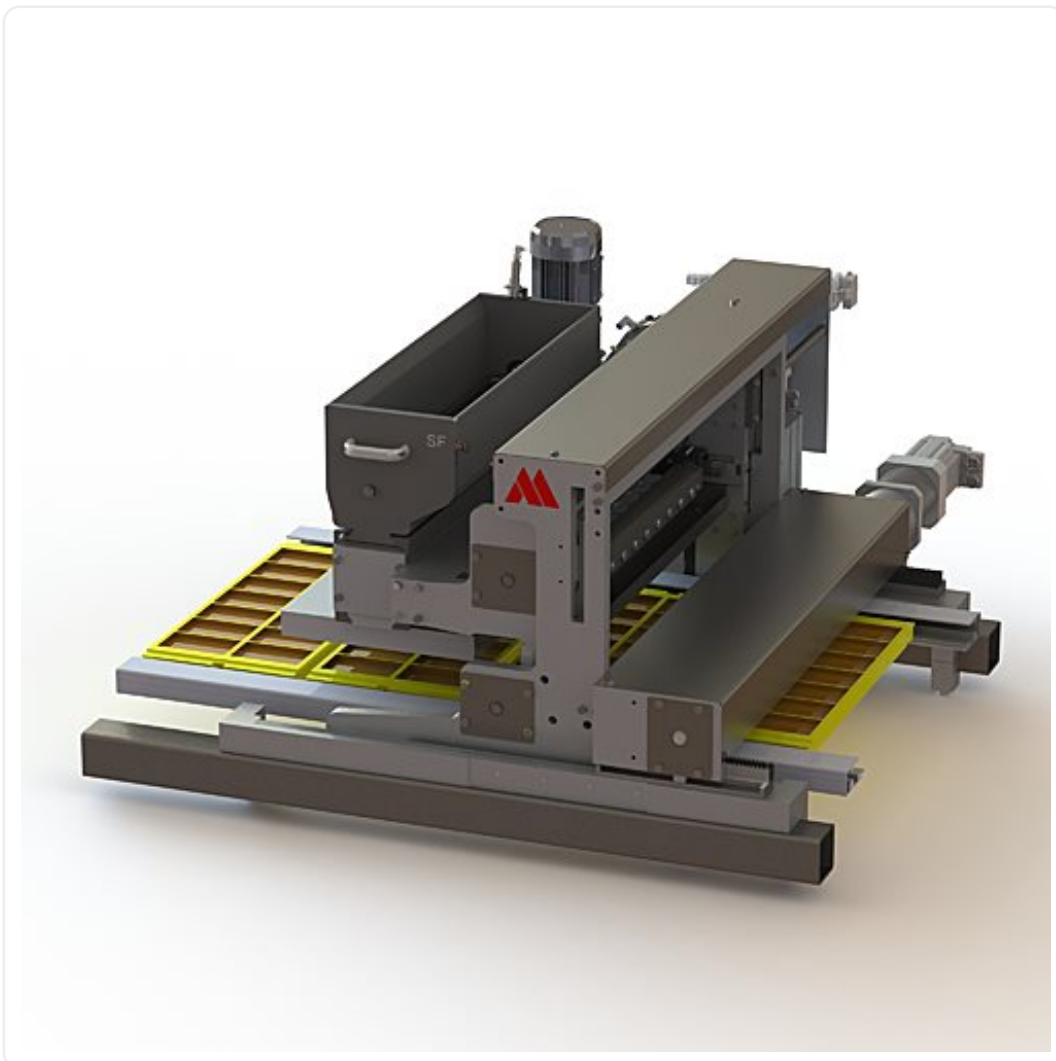


Stationary mounted depositor with dynamic hopper movement and built-in lifting function. Right or left mounted, can be built with left/right mounted to double.

Stationary, right or left mounted depositor with lifting and dynamic hopper movement. The SF line represents the flexible depositor with high build quality. The piston axis is servo driven for handling most masses. The rotary and the lifting movement axes are optional servo or pneumatically driven. The hopper movement axis is servo driven. The SF is able to easily handle big inclusions.

Depositing parts can be delivered in a wide variety to suit the demand, for example, multi-colour, one-shot, inclusions, chips and many more. The SF depositor is available for 500 and up to 1200 lines, working widths ranging from 380 to 1080 mm, however, the depositor can be made to suit any existing lines as well. Operation is very simple via the intuitive touch screen menu. Further the depositor is able to connect to the internet, if any sort of support is needed.

UPS/EFU

- Easy and simple to operate
- High flexibility
-
- Cost-effective
- Easy cleaning and maintenance
- High precision depositing

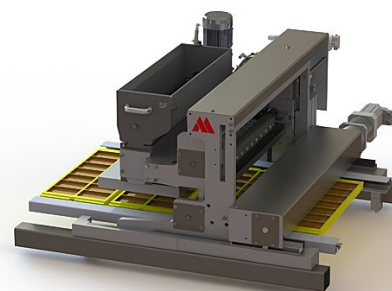

The Aasted Machinery Program

Find the technical specifications for the machine below.

	SF Single LRVO 500	SF Single LRVO 700	SF Single LRVO 1000	SF Single LRVO 1200
Capacity (kg/hour)	2300	3900	5900	7500
Length (mm)	1300	1500	2000	2200
Width (mm)	995	995	995	995
Height (mm)	860	860	2000	860
Power usage (KwH)	5	5	5	5
Air usage (m3)	12	12	18	18
Water usage (m3)	0,007	0,008	0,01	0,013
Weight (kg)	300	330	425	495

We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- SF Double L+R O
- SF Double L+R
- SF Double L+R V
- SF Double L+R V O
- SF Single L/R
- SF Single L R O
- SF Single L R V
- SF Triple L+R+T
- SF Triple L+R+T O
- SF Triple L+R+T V
- SF Triple L+R+T V O