


RF Triple L+R+T V

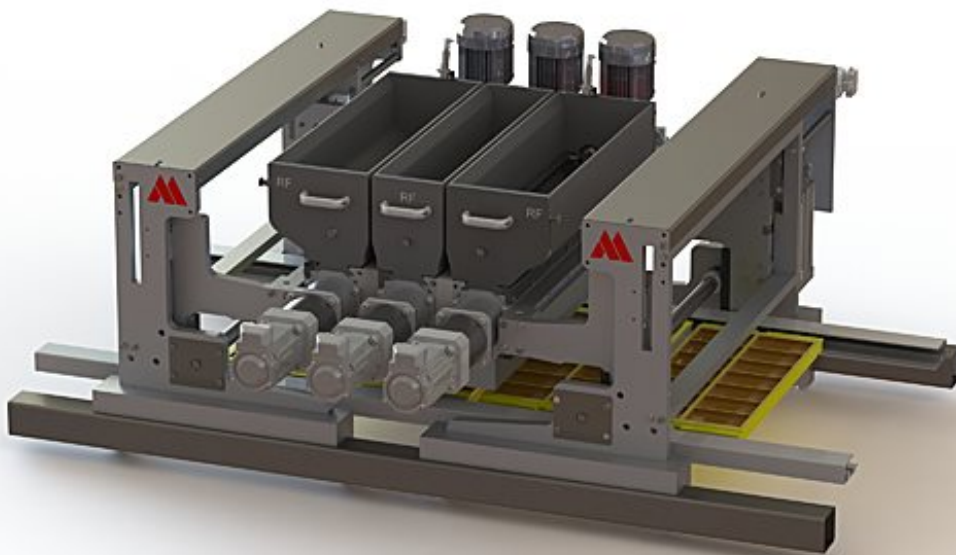

RF Triple L+R+T V


Stationary mounted depositor. Built in lifting function.
Compatible with triple-shot depositing.

Stationary, right or left mounted depositor with built-in lifting and dynamic hopper movement. The RF line is a flexible depositor manufactured at the highest quality. The servo driven double motor axis handles most masses. The built-in lifting movement can be servo or pneumatically driven. The hopper movement axis is servo driven. The RF depositor easily handles small inclusions.

This depositor is compatible with multi-color, one-shot, inclusions, chips and a variety of other heads. The RF depositor's production capacity ranges from 500 - 1200 lines, with belt widths ranging from 380 to 1080 mm. The depositor can also be made to suit any existing lines. The interactive touch screen menu makes this depositor easily operable. The depositor is also equipped with internet connection for technical support.

UPS/EFU

- Easily handles small inclusions
- Triple-shot configuration
- Interactive
- Easy cleaning and maintenance
- Highly flexible
- Servo driven hopper movement

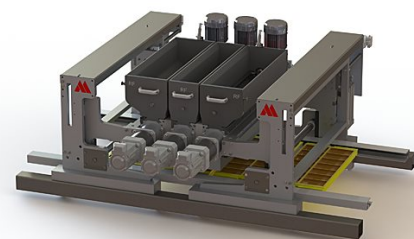

The Aasted Machinery Program

Find the technical specifications for the machine below.

	Sophus RF Triple L+R+T+V 500	Sophus RF Triple L+R+T+V 700	Sophus RF Triple L+R+T+V 1000	Sophus RF Triple L+R+T+V 1200
Capacity (kg/hour)	4300	5400	8640	10500
Length (mm)	1300	1500	2000	2200
Width (mm)	1300	1300	1300	1300
Height (mm)	860	860	860	860
Power usage (KwH)	11	11	11	11
Air usage (m3)	10	10	16	16
Water usage (m3)	0,014	0,016	0,02	0,026
Weight (kg)	540	885	1420	1750

We have a broad portfolio of machinery and equipment

Beneath are listed products in the same category.

- RF Single L/R
- RF Single L/R O
- RF Single L/R V
- RF Single L R V O
- RF Triple L+R+T
- RF Triple L+R+T O
- RF Triple L+R+T V O